



Furon® Metering Valve


Manually Actuated, Multi-Turn Valve (1/16" Orifice)

Description

Furon Metering Valves offer a means of precisely metering liquid or gas flow. Our metering valves feature a "needle" design with a manual knob and fine-thread adjustment stem, allowing the end user to very precisely set the valve for the desired liquid or gas flow. Constructed from 100% virgin PTFE wetted parts, they are suitable for use with harsh, aggressive, or ultra-pure chemistry and most gases. Bubble-tight sealing assures no leakage in gas applications. Panel mount feature is standard on all Metering Valves, allowing the user to easily mount the valves on an instrumentation or control panel.

Applications

- Precise regulation of chemical or gas flow in wafer processing applications
- Flow regulation in DI water systems
- Instrumentation requiring precise flow regulation of gas or chemical
- Laboratory applications

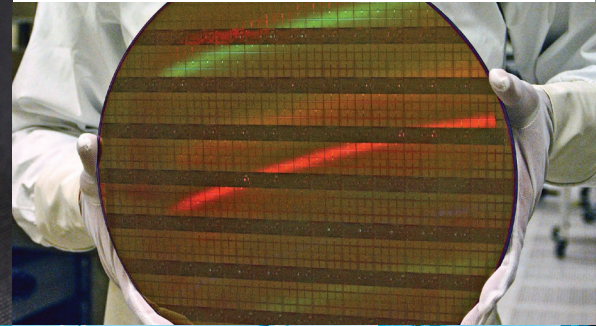

Features and Benefits

- 100% virgin PTFE wetted parts for high purity and corrosion resistance
- Fine thread on needle stem allows precise metering and flow control
- Small footprint design
- Bonnets and packing easily removable for cleaning
- Straight through flow path construction
- 90° angle body available as option

ASK AN ENGINEER

Furon Metering Valve


Part Number	End Connection	Orifice (in.)	Port Size (in.)	A
MV1-12	FNPT	1/16	1/8	1.49" (37.85 mm)
MV1-14	FNPT	1/16	1/4	1.67" (42.42 mm)
MV2-12	Grab Seal*	1/16	1/8	2.29" (58.16 mm)
MV2-14	Grab Seal*	1/16	1/4	2.29" (58.16 mm)
MV5-12	MNPT	1/16	1/8	1.75" (44.45 mm)
MV5-14	MNPT	1/16	1/4	1.75" (44.45 mm)

Ordering & Technical Specifications



Max. Operating Pressure	75 psig (5.2 bar)
Max. Operating Temperature	212°F (100°C)
Flow Factor	C _v 0.2 - 0.5
Body	PTFE
Needle & Stem	PTFE
Adjustment Knob	Polypropylene

Standard Options

- 90° angled body (MVA Series)
- Other end connection types available:
Nipon Pillar Super 300®
Tube ends
Others not listed

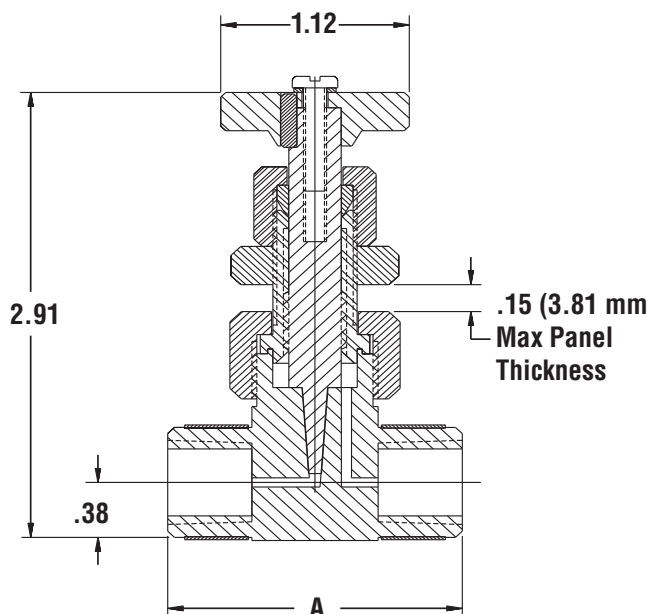

Flow Characteristics

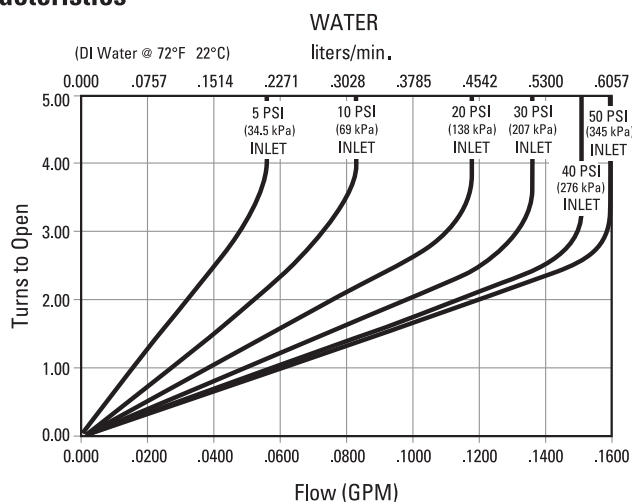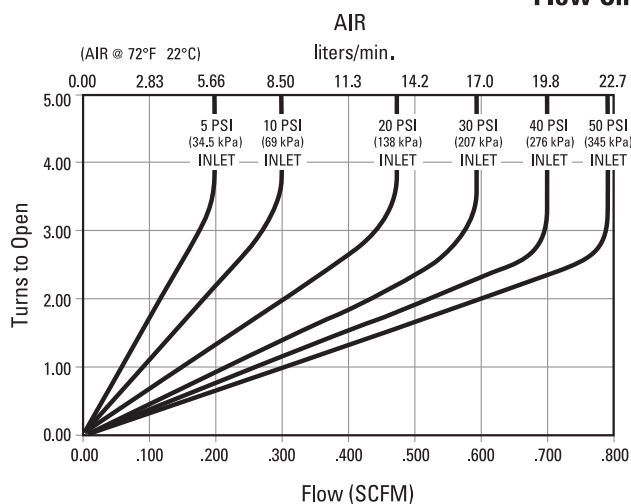

Saint-Gobain Performance Plastics

7301 Orangewood Avenue
Garden Grove, CA 92841

1-800-833-5661
Tel: (714) 630-5818
Fax: (714) 688-2614

www.processsystems.saint-gobain.com

NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Furon®, FlareGrip® and FuseBond™ are registered trademarks of Saint-Gobain Performance Plastics. Super 300® is a registered trademark of Nippon Pillar Packaging Co. LTD.

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the components to be used comply with all applicable regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse arising out of the design, fabrication or application of the products into which they are incorporated.

WARRANTY: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.