

## FS-400 Series – General Purpose, 90° Flow Path

**Flow Rate Settings:** Fixed Version: 0.75 GPM to 10.0 GPM  
Adjustable Version: 0.75 GPM to 14.0 GPM

**Port Size:** 3/4"

**Primary Construction Material:** Bronze

**Setting Type:** Fixed or Adjustable

Provides accurate flow detection in water and oil with 1% repeatability. Flow settings on the adjustable version can be easily changed without disassembly. A shuttle by-pass vane inside the housing is controlled externally using an ordinary flat-blade screwdriver. These switches are ruggedly constructed of non-corrosive materials and resist shock and vibration. Suitable for triggering alarms on interlocking shutdown circuitry when flow rate is improper to protect bearings, gears and cooling systems.

### Specification

<b>Wetted Materials</b>	
<b>Housing</b>	Bronze
<b>Shuttle</b>	Delrin®
<b>Spring</b>	316 Stainless Steel
<b>O-Ring</b>	Viton®
<b>Other Wetted Parts</b>	Ceramic
<b>Pressure Rating, Maximum Operating</b>	
	400 PSI (27.6 bar) @ 100°F (+37.8°C)
<b>Proof</b>	800 PSI (55.2 bar) @ 100°F (+37.8°C)
<b>Operating Temperature</b>	-20°F to +180°F (-29°C to +82.2°C)
<b>Repeatability</b>	1% Maximum Deviation
<b>Set Point Accuracy</b>	±10%
<b>Set Point Differential</b>	15% Maximum
<b>Switch*</b>	SPDT, 20 VA
<b>Inlet/Outlet Ports</b>	3/4" NPT
<b>Electrical Termination</b>	No. 18 AWG, 24" L., Polymeric Lead Wires

\*See "Electrical Data" on Page X-5 for more information.

### How To Order – Standard Models

Specify Part Number based on flow settings for the FS-400 Series, based on flow setting range for the FS-400 Adjustable version.

#### FS-400 Series

NPT	Flow Setting GPM	Part Numbers
3/4"	0.75	26440 ⚡
	1.5	26441
	2.0	26442
	2.5	26443
	5.0	26444
	7.5	26445
	10.0	26446

#### FS-400 Adjustable

NPT	Flow Setting GPM	Part Numbers
3/4"	0.75-4.0	26600 ⚡
	2.0-8.0	26601 ⚡
	7.0-14.0	26602


#### Notes:

- Flow settings for Fixed Version are calibrated using water at +70°F on increasing flow, with units in a vertical position (lead wires up). Temperature changes will slightly affect the flow settings listed.
- Adjustable units that are set to customer specifications are subject to GEMS test stand accuracy.
- Use of 150 micron filtration is recommended.
- Minimum 5 PSI line pressure required.


⚡ – Stock Items.



### Dimensions



### Pressure Drop - Typical

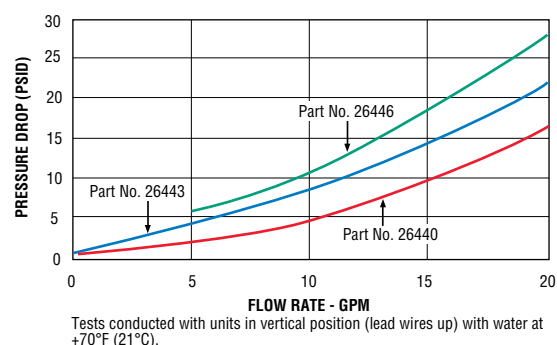

**FS-400 switches are U.L. Approved for Class I, Division 2, Groups A, B, C, D hazardous areas.**

Available with FM-approved, explosion-proof junction box for Class I, Division 1, Group D hazardous locations. Units must be assembled completely at GEMS.  
U.L. Approved — File No. E183854