






Type 700

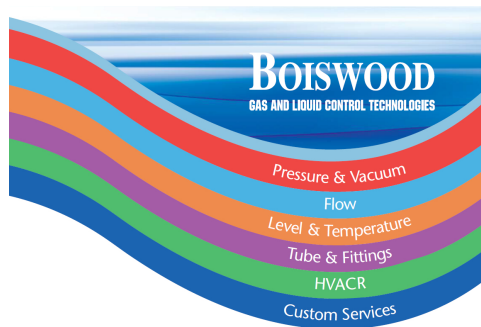

ND	08	10	15
INLET	1,4"	3/8"	1/2"
OUTLET		1/2"	
A		28	
B		50	
C1		114	
C2		107	
SET PRESSURE MAXI		12 bar	
SET PRESSURE MINI		0,2 bar	


TIGHT PLUG

UNTIGHT PLUG + LIFTING RING




Connection


SCREWED CONNECTION



CLAMP CONNECTION



SMS CONNECTION



Special design

HIGH PRESSURE



Order information

TYPE	PLUG	CONNECTION	MATERIAL	PN/CLASS	DN PN10 + NPT
7	1 TIGHT	0 - SCREWED / THREADED BSP 7 - ATMOSPHERE	I- STAINLESS STEEL	R - PN16	DN 08 (1/4")
	2 TIGHT	0 - CLAMP / THREADED BSP 2 - SMS / THREADED		R - PN10	DN 10 (3/8")
	5 UNTIGHT + LEVER	0 - SCREWED / THREADED BSP		R - PN16	DN 15 (1/2")
	6 7 TIGHT+ + LEVER			R - PN16	DN 20 (3/4")