



MEASURING • MONITORING • ANALYSING

PRODUCT SUMMARY



FLOW • PRESSURE • LEVEL • TEMPERATURE • PH-VALUE/REDOX • CONDUCTIVITY • HUMIDITY • TURBIDITY • DENSITY



Home plant in Hofheim near Frankfurt, Germany

Founded in 1980 by Dipl.-Ing Klaus J. Kobold, KOBOLD is a global leader in the field of measurement and control technology. The KOBOLD brand is characterized by patented technology, high quality products, and exceptional customer service.

advance the field of instrumentation. They also work directly with customers to develop customized solutions for their exact needs and can create and build what other companies cannot.

From offices and production facilities in over 30 countries KOBOLD develops, manufactures, and distributes instrumentation for measuring, monitoring, and controlling flow, pressure, level, and temperature. Experienced engineers from a wide range of industrial sectors and disciplines develop ideal application solutions and

With such expertise and the ability to develop, manufacture, sell, and support the products, KOBOLD is uniquely positioned to quickly meet the changing needs of various industries with excellence

Product categories

Flow
3 - 20

Temperature
36 - 38

Pressure
21 - 27

Analysis
39 - 40

Level
28 - 35

Accessories
40 - 42

Feature Icons

- QR code for product information
- High Quality/Low Cost
- Stainless steel design
- For chemicals
- Shock resistant
- Heating jacket
- Battery powered/external power supply
- Battery powered
- Sensor supply
- Installation under process conditions
- Scalable analogue output
- Rotatable display
- Configurable display
- Bi-directional
- Total and partial quantity counter
- Configurable outputs
- Operational with gloves
- Temperature and pressure measurement
- Temperature and flow measurement
- Energy measurement
- Space saver
- NFC



KSV

Variable Area-Plastic - Low Volume

Polysulfone/brass, polysulfone/stainless steel



- Water: 0.25 - 1.5 l/h ... 10 - 80 l/h
- Air: 20 - 80 NI/h ... 0.5 - 2.4 Nm³/h
- t_{max} 120 °C; p_{max} 6 bar
- Connection: 1/8" NPT female thread
- Accuracy: $\pm 6\%$ of full scale



KFR

Variable Area-Plastic - Low Volume

Acrylic/brass, acrylic/stainless steel



- Water: 10 - 100 cm³/min ... 1 - 10 l/min
- Air: 0.04 - 0.5 ... 100 - 700 l/min
- t_{max} 65 °C; p_{max} 6.5 bar
- Connection: 1/8" NPT, 1" NPT female thread
- Accuracy: $\pm 2... \pm 5\%$ of full scale



KSK

Variable Area - Plastic

Trogamide®, polysulfone




- Water: 1.5 - 11 l/h ... 100 - 1000 l/h
- Air: 0.15 - 0.45 ... 20 - 105 Nm³/h
- t_{max} 140 °C; p_{max} PN 10
- Connection: G 1/4 ... 1 female thread, glue-in connection
- Accuracy: cl. 4 according to VDI



KSM

Variable Area - Plastic

Trogamide®, polysulfone



- Water: 15 - 150 l/h ... 8000 - 60000 l/h
- Air: 0.8 - 5 Nm³/h ... 300 - 2500 Nm³/h
- t_{max} 100 °C; p_{max} 16 bar
- Connection: 1/2" ... 3 1/2"
- Accuracy: cl. 4 according to VDI



KSR/SVN

Variable Area - Low Volume - Switch

Stainless steel



- Water: 2 - 250 ml/min
- Air: 3 - 360 NI/h
- t_{max} 70 °C; p_{max} 16 bar
- Connection: G 1/4, 1/4" NPT female thread



KDF-9/KDG-9

Variable Area - Low Volume

Stainless steel



- Water: 0.02 - 0.25 l/h ... 10 - 100 l/h
- Air: 2 - 20 NI/h ... 300 - 3000 NI/h
- t_{max} 100 °C; p_{max} 16 bar
- Connection: G 1/4, 1/4" NPT female thread
- Accuracy: $\pm 3\%$ $q_G = 50\%$
- Option: inductive contacts



KDF-2/KDG-2

Variable Area - Low Volume

Stainless steel



- Water: 0.25 - 2.5 l/h ... 16 - 160 l/h
- Air: 0.5 - 5 NI/h ... 500 - 5000 NI/h
- t_{max} 100 °C; p_{max} 16 bar
- Connection: G 1/4, 1/4" NPT female thread, hose nozzle 8 mm
- Accuracy: $\pm 2.5\%$ $q_G = 50\%$
- Option: inductive contacts



URM

Variable Area - Glass Cone - Thread Connection

Stainless steel, PVC



- Water: 0.25 - 2.5 l/h ... 2500 - 25000 l/h
- Air: 3.2 - 32 NI/h ... 32 - 320 Nm³/h
- t_{max} 100 °C; p_{max} 16 bar
- Connection: G 3/8 ... 3 male, G 1/4 ... 1 1/2 female
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$





Flow Meters / Switches / Controllers

URB

Variable Area - Glass Cone

PVC



- Water: 10 - 100 l/h ... 100 - 1000 l/h
- Air: 0.32 - 3.2 Nm³/h ... 3.2 - 32 Nm³/h
- t_{max} 65 °C; p_{max} 3 bar
- Connection: G 1/2 ... 1 1/4 male/female thread
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



UVR / UTR

Variable Area - Glass Cone

Stainless steel, POM-C



- Water: 10 - 100 l/h ... 200 - 2000 l/h
- Air: 0.1 - 1 Nm³/h ... 5 - 50 Nm³/h
- t_{max} 100 °C; p_{max} 10 bar
- Connection: G 3/8, G 1/2 female thread
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



URL

Variable Area - Glass Cone - Loose Flange

PVC, PTFE



- Water: 1 - 10 l/h ... 250 - 2500 l/h
- Air: 0.025 - 0.25 Nm³/h ... 10 - 100 Nm³/h
- t_{max} 100 °C; p_{max} 10 bar
- Connection: loose flange DN 15 ... 40
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



V31

Variable Area - Glass Cone

Stainless steel, PVDF, PVC



- Water: 3 - 30 l/h ... 1000 - 10000 l/h
- Air: 36 - 360 NI/h ... 18 - 180 Nm³/h
- t_{max} 80 °C; p_{max} 15 bar
- Connection: G 1/4 ... 2 female, flange DN 10 ... 65, ANSI 1/2 ... 2 1/2"
- Accuracy: $\pm 1.6... \pm 2.5\%$ $q_G = 50\%$



URK

Variable Area - Glass Cone - Fixed or Loose Flange

Stainless steel



- Water: 1 - 10 l/h ... 15000 - 50000 l/h
- Air: 0.02 - 0.2 Nm³/h ... 50 - 500 Nm³/h
- t_{max} 100 °C; p_{max} 16 bar
- Connection: flange DN 15 ... 80, ANSI 1/2 ... 3"
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



USR

Manifold Valves for Multiple Installation (for liquids)

Brass



- Water: 0.04 - 0.4 ... 1 - 10 l/min
- t_{max} 100 °C; p_{max} 16 bar
- Connection inlet: G1 or 1" NPT female
- Connection outlet: G 1/4, G 3/8, 1/4" NPT, 3/8" NPT female, hose \varnothing 10, \varnothing 13, \varnothing 15 mm
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



UTS

Variable Area - Glass Cone (for gas burners)

Brass, stainless steel



- Air: 10 - 100 NI/h ... 0.3 - 3 Nm³/h
- t_{max} 65 °C; p_{max} 3 bar
- Connection: M 18x1.5, G 1/4, 1/4" NPT
- Accuracy: $\pm 2... \pm 2.5\%$ $q_G = 50\%$



KDS

Variable Area - Low Volume

Stainless steel



- Water: 0.1 - 1 l/h ... 20 - 200 l/h
- Air: 3 - 30 NI/h ... 600 - 6000 NI/h
- t_{max} 130 °C; p_{max} PN 40/63
- Connection: 1/4" NPT female thread
- Accuracy: $\pm 3\%$ $q_G = 50\%$
- Options: analogue output 4 - 20 mA, inductive contacts





DSV

Variable Area

Brass, stainless steel



- Water: 0.25 - 1.25 l/min ... 10 - 130 l/min
- t_{max} 100 °C; p_{max} 10 bar
- Connection: G ¼ ... 1 ¼, ¼ ... 1 ¼" NPT female
- Accuracy: $\pm 4\%$ of full scale



SWK

Variable Area - Low Volume

Brass, stainless steel, PVC

Switch
SWK-11



Meter/Switch
SWK-22



Switch
SWK-13



- Water: 0.05 - 1 l/min ... 13 - 24 l/min
- t_{max} 100 °C; p_{max} 250 bar
- t_{max} 60 °C; p_{max} 6 bar (SWK-13)
- Connection: G ½ female thread
- Accuracy: $\pm 4\%$ of full scale



BGK

Variable Area - Low Volume

Stainless steel



- Water: 0.1 - 1 l/h ... 20 - 200 l/h
- Air: 3 - 30 NI/h ... 600 - 6000 NI/h
- t_{max} 130 °C; p_{max} PN40 (higher on request)
- Connection: DN 10, DN 15, DN 25, ANSI ½", ¾", 1"
- Accuracy: $\pm 3\%$ $q_G = 50\%$
- Options: analogue output 4 - 20 mA, inductive contacts



BGN

Variable Area

Stainless steel, PTFE/stainless steel, special material on request



- Water: 0.5 - 5 l/h ... 13000 - 130000 l/h
- Air: 0.015 - 0.15 ... 240 - 2400 Nm³/h
- t_{max} 350 °C; p_{max} PN40 (higher on request)
- Connection: flange DN 15 ... 150, ANSI ½" ... 6"
- Accuracy: $\pm 1.6... \pm 2.2\%$ $q_G = 50\%$
- Options: analogue output, BUS-Interface, heating jacket, contacts



BGN - HIGH PRESSURE

Variable Area

Stainless steel special material on request



- Water: 0.5 - 5 l/h ... 13000 - 130000 l/h
- Air: 0.015 - 0.15 ... 240 - 2400 Nm³/h
- t_{max} 350 °C; p_{max} 600 bar
- Connection: flange DN 15 ... 150, ANSI ½" ... 6", thread, special connections
- Accuracy: $\pm 1.6... \pm 2.2\%$ $q_G = 50\%$
- Options: analogue output, BUS-Interface, heating jacket, contacts



BGF

Variable Area - Mounting Position Independent

Stainless steel, PTFE/stainless steel, special material on request



- Water: 10 - 100 l/h ... 6000 - 60000 l/h
- Air: 0.3 - 3 Nm³/h ... 110 - 1100 Nm³/h
- t_{max} 200 °C; p_{max} PN40
- Connection: flange DN 15 ... 80, ANSI ½" ... 3"
- Accuracy: $\pm 2\%$ $q_G = 50\%$
- Options: analogue output, BUS-Interface, heating jacket, contacts





Flow Meters / Switches

DSS

Variable Area

Brass, stainless steel



- Water: 0.05 - 1 l/min ... 10 - 110 l/min
- t_{max} 100 °C; p_{max} **350 bar**
- Connection: G ¼ ... 1¼, ¼ ... 1¼" NPT female thread
- Accuracy: ± 5 % of full scale



SMV

Variable Area

Brass, stainless steel



- Water: 0.1 - 1 l/min ... 10 - 110 l/min
- t_{max} 100 °C; p_{max} **350 bar**
- Connection: G ¼ ... 1¼, ¼ ... 1¼" NPT female thread
- Accuracy: ± 5 % of full scale



SMO / SMW

Variable Area

Brass, stainless steel



- Water: 0.2 - 3 l/min ... 10 - 120 l/min
- t_{max} 100 °C; p_{max} **350 bar**
- Connection: G ¼ ... 1, ¼ ... ¾" NPT female thread
- Accuracy: ± 5 % of full scale



SMN

Variable Area Switch

Brass, stainless steel



- Water: 1 - 100 l/min
- Fixed Switch point at ~1 l/min falling flow
- t_{max} 100 °C; p_{max} **350 bar**
- Connection: 1" NPT, G 1 female thread
- Accuracy: ± 5 % of full scale



VKP

Viscosity Compensated - Plastic

Polysulfone



- Water: 2 - 20 l/min ... 20 - 100 l/min
- Oil: 1 - 18 l/min ... 10 - 75 l/min
- t_{max} 120 °C; p_{max} 16 bar
- Connection: G ½, G ¾ female/male thread, G 1, 1" NPT male thread soldered or glue-in connection
- Accuracy: ± 5 % of full scale



VKG

Viscosity Compensated

Brass, stainless steel



- Viscosity range: 1 - 540 mm²/s
- Oil: 0.1 - 0.45 l/min ... 5 - 80 l/min
- t_{max} 100 °C; p_{max} 12 bar
- Connection: G ¼ ... 1, ¼ ... 1" NPT
- Accuracy: ± 4 % of full scale



VKM

Viscosity Compensated

Brass, stainless steel



- Viscosity range: 1 - 540 mm²/s
- Oil: 0.01 - 0.07 l/min ... 8 - 80 l/min
- t_{max} 100 °C; p_{max} 350 bar
- Connection: G ¼ ... 1, ¼ ... 1" NPT
- Accuracy: ± 4 % of full scale



VKM + ADI - 1

Viscosity Compensated

Brass, stainless steel



- Viscosity range: 1 - 540 mm²/s
- Oil: 0.01 - 0.07 l/min ... 8 - 80 l/min
- t_{max} 100 °C; p_{max} 350 bar
- Connection: G ¼ ... 1, ¼ ... 1" NPT
- Accuracy: ± 4 % of full scale





BVB

Manifold Valves for Multiple Installation

Aluminium



- t_{max} 100 °C; p_{max} PN 64
- Connection: G 1/2 female thread
- Suitable for models: VKA, VKM, DSV, VKG



PSR

Paddle Switch

Brass, stainless steel



- Water: 2.3 - 4.7 l/min ... 47.6 - 67.2 l/min
- t_{max} 110 °C; p_{max} 250 bar
- Connection: G 1/4 ... 1 1/2, 1/4 ... 1 1/2" NPT female thread



PSE

Paddle Switch

Brass, stainless steel



- Water: 68 - 90 l/min ... 383 - 533 l/min
- t_{max} 110 °C; p_{max} 250 bar
- Connection: G 1/2, 1/2" NPT male thread



PPS

Paddle Switch

Polysulfone



- Water: 18 - 36 l/min ... 72 - 108 l/min
- t_{max} 105 °C; p_{max} 10 bar
- Connection: G 1, 1" NPT male thread
- Accuracy: $\pm 20\%$ of reading



LPS

Paddle Switch - Air

Brass



- Air: 1 - 8 m/s
- t_{max} 85 °C; p_{max} atmospheric
- Connection: Connection plate



FPS

Paddle Bellow Switch

Brass, stainless steel



- Water: 0.17 - 0.85 m³/h ... 72.6 - 165.7 m³/h
- t_{max} 120 °C; p_{max} 30 bar
- Connection: G 1/2, G 3/4 female thread, R 1, 1" NPT male thread



DWU / DWN

Paddle Bellow Meter/Switch

Brass, stainless steel



- Oil/Water: 1 - 5 l/min ... 900 - 3600 m³/h
- t_{max} 100 °C; p_{max} PN 16
- Connection: G 3/8 ... 2, 3/8 ... 2" NPT female thread, flange DN 10 ... 50, ANSI 3/8 ... 2", weld-on flange DN 40 ... 500
- Accuracy: $\pm 3... \pm 5\%$ of full scale



DWD

Baffle Flap Meter/Switch

Brass, stainless steel, PVC



- Water: 1 - 10 l/min ... 360 - 3600 m³/h
- t_{max} 120 °C; p_{max} 25 bar
- Connection: G 3/8 ... 2, 3/8 ... 2" NPT female, flange DN 10 ... 50, ANSI 3/8 ... 2", weld-on flange DN 40 ... 500
- Accuracy: $\pm 1.5\%$ of full scale





Flow Meters / Switches

DPT

Paddle Torsion - Meter/Switch

Brass, stainless steel

Compact Electronics
...C3



Digital Display
...K



- Water: 5 - 30 l/min ... 850 - 1900 l/min
- t_{max} 80 °C; p_{max} PN 40
- Connection: G 3/8 ... 3, 3/4 ... 3" NPT female
- Accuracy: $\pm 3\%$ of full scale



TSK

Flap Meter/Switch

Steel, stainless steel, PTFE, Hastelloy®



- Water: 0.5 - 3.5 m³/h ... 200 - 1500 m³/h
- t_{max} 300 °C; p_{max} PN 40
- Connection: wafer flange DN25 ... 500, ANSI 1 ... 20"
- Accuracy: from $\pm 2.5\%$ of full scale



DRS

Turbine Wheel - ...

Brass, stainless steel, PPO

Pulse Output
...S0



Analogue Output
...L3



Compact Electronic
...C3



Counter
...+ ZED



- Water: 2 - 40 l/min
- t_{max} 150 °C; p_{max} 200 bar
- Connection: G 1/2, G 3/4, 3/4" NPT
- Accuracy: from $\pm 1.5\%$ of full scale



max 150 °C

max 150 °C



TUR

Turbine Wheel - ...

PVC, PVDF

Pulse Output
TUR-1



Analogue Output
TUR-2...M



Compact Electronics
TUR-2...C3



Digital Display
TUR-2...K



- Water: 0.2 - 5 m³/h ... 2.5 - 100 m³/h
- t_{max} 70 °C; p_{max} 10 bar
- Connection: flange DN25 ... 100
- Accuracy: $\pm 1\%$ of full scale





DPE

Turbine Wheel - ...

Brass, stainless steel

Pulse Output
...F / L

Analogue Output
...+ AUF

Compact Electro.
...C3

Digital Display
...+ ADI-1

Dosing Electronics
...+ ZED

- Water: 5 - 30 l/min ... 50 - 750 l/min
- t_{max} 80 °C; p_{max} PN 40
- Connection: G 1/2 ... 3, 1/2 ... 3" NPT female thread, weld-on sleeve DN25 ... 80
- Accuracy: $\pm 2.5\%$ of full scale



DRB

Turbine Wheel - ...

Brass, stainless steel

Pulse Output
...F / L

Analogue Output
...+ AUF

Compact Electro.
...C3

Digital Display
...+ ADI-1

Dosing Electronics
...+ ZED

- Water: 5 - 30 l/min ... 50 - 750 l/min
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 1/2 ... 3, 1/2 ... 3" NPT female thread, weld-on sleeve DN25 ... 80
- Accuracy: $\pm 3\%$ of full scale



TUV

Turbine Wheel - Pulse Output

Stainless steel

- Water: 0.3 - 1.5 l/min ... 35 - 400 l/min
- t_{max} 350 °C; p_{max} 630 bar
- Connection: G 1/4 ... 1 1/2 female thread
- Accuracy: $\pm 1\%$ of reading



SFL

Turbine Wheel - Pulse Output

PVDF, Stainless steel

- Water: 0.5 - 20 l/min
- t_{max} 90 °C; p_{max} 250 bar
- Connection: G 3/8
- Accuracy: $\pm 1\%$ of full scale



DOT

Turbine Wheel

Stainless steel

- Water: 0.11 - 1.1 m³/h ... 270 - 2700 m³/h
- t_{max} 120 °C; p_{max} 250 bar
- Connection: G 1/2 ... 2, 1/2 ... 2" NPT, flange DN 15 ... 300
- Accuracy: $\pm 0.5\%$ (linearity)



PEL - L

Turbine Wheel - Low Volume

Stainless steel, aluminium

- Water: 0.004 - 0.06 ... 0.1 - 28 l/min
- t_{max} 135 °C; p_{max} 345 bar
- Connection: R 1/4 ... 1/2 wafer flange DN 40/50, 1/2" glue-in connection, hose nozzle
- Accuracy: $\pm 2\%$ of reading





Flow Meters / Switches

KFF-1 / KFG-1

Rotating Vane - Low Volume

Brass, Ryton®



- Water: 15 - 100 ml/min ... 1 - 10 l/min
- Air: 10 - 50 Nml/min ... 100 - 500 L_N/min
- t_{max} 50 °C; p_{max} 35 bar
- Connection: hose connection 1/8" ... 1/2"
- Accuracy: ± 3% of full scale



KFF-3 / KFG-3

Rotating Vane - Low Volume

Brass, Ryton®



- Water: 13 - 100 ml/min ... 0.25 - 5 l/min
- Air: 10 - 50 Nml/min ... 2 - 10 L_N/min
- t_{max} 50 °C; p_{max} 35 bar
- Connection: hose connection 1/8" ... 1/2"
- Accuracy: ± 3% of full scale



DPM

Rotating Vane - Low Volume - ...

Brass, stainless steel

Pulse Output
...F5

Analogue Output
...L3 ... L4 + AUF

Compact Electronics
...C3

Counter
...+ ZED

- Water: 0.015 - 0.7 l/min ... 0.05 - 5 l/min
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 1/8, G 1/4, 1/8" NPT, 1/4" NPT female thread
- Accuracy: ± 1 ... ± 2.5 % of full scale



DPL

Rotating Vane - Low Volume - ...

Polypropylene

Pulse Output
...F5

Analogue Output
...L3 ... L4 + AUF

Compact Electronic
...C3

Counter
...+ ZED

- Water: 0.025 - 0.5 l/min ... 1 - 25 l/min
- t_{max} 70 °C; p_{max} 10 bar
- Connection: G 1/2 male thread, hose nozzle
- Accuracy: ± 2.5 % of full scale



DF

Rotating Vane - ...

Trogamide®, polysulfone, brass, polypropylene, stainless steel

Pulse Output
...H

Analogue Output
...MA

Switch
...WM

Digital Display
...K

Counter
...Z

Dosing Electronic
...D

- Water: 0.08 - 0.5 l/min ... 40 - 160 l/min
- t_{max} 80 °C; p_{max} 100 bar
- Connection: G 1/4 ... 1 1/2, 1/4 ... 1 1/2" NPT female thread, flange DN 15 ... 50, ANSI 1/2 ... 2"
- Accuracy: ± 2.5 % of full scale





DFT

Rotating Vane - ...

Brass, PTFE
Pulse Output
11



Pulse Output
13



Counter/Dosing Electronic
13...E/G



- Water: 0.2 - 2 l/min ... 3 - 60 l/min
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 1/4 ... 3/4, 1/4 ... 3/4" NPT female thread
- Accuracy: $\pm 2.5\%$ of full scale

DRH

Rotating Vane - ...

POM, PVDF, brass, stainless steel
Analogue Output
...F / L



Analogue Output
... + AUF



Compact Electronics
...C3



Digit Disp/Counter/Dosing
...E / G



- Water: 0.2 - 0.8 l/min ... 2.5 - 50 l/min
- t_{max} 80 °C; p_{max} 100 bar
- Connection: G 3/8, G 1, 3/8" NPT, 1" NPT female thread
- Accuracy: $\pm 2.5\%$ of full scale

DRG

Rotating Vane - ...

Polypropylene, brass, stainless steel
Pulse/Analo. Output
...F / L



Analogue Output
... + AUF



Compact Electronics
...C3



Digit Disp/Counter/Dosing
...+ ADI-1/ZED



- Water: 0.5 - 12 l/min ... 10 - 140 l/min
- t_{max} 80 °C; p_{max} 40 bar
- Connection: G 1/8 ... 1, 1/8 ... 1" NPT female thread
- Accuracy: $\pm 3\%$ of full scale

DTK

Rotating Vane - Low Volume

Stainless steel



- Water: 0.05 - 0.6 l/min ... 1 - 12 l/min
- t_{max} 140 °C; p_{max} 30 bar
- Connection: G 1/4, 1/4" NPT female thread
- Accuracy: $\pm 2\%$ of full scale

LFM

Dual-Ring Piston - Pendulum - Low Volume

Stainless steel



- Water: 0.005 - 0.25 l/min
- t_{max} 80 °C; p_{max} 100 bar
- Connection: G 1/8, Swagelok® 6 mm
- Accuracy: $\pm 2.5\%$ of reading



Flow Meters / Switches

DRZ

Ring Piston Counter - ...

Brass
Pulse Output
...F



Analogue Output
...+ AUF



Compact Electronics
...C3



- Viscosity range: 5 - 100 mm²/s
- Oil: 6 - 420 l/h
- t_{max} 80 °C; p_{max} 40 bar
- Connection: G 1/8, G 1/4, 1/8" NPT, 1/4" NPT female thread
- Accuracy: ± 1 % of reading

OVZ

Oval Wheel - ...

POM, aluminium
Pulse Output
...I4



Analogue Output
... L4 + AUF



Compact Electronics
...C3



Dosing Electronics
...+ ZED



- Viscosity range: 10 - 800 mm²/s
- Oil: 0.1 - 2.0 l/min ... 1.6 - 40 l/min
- t_{max} 80 °C; p_{max} 40 bar
- Connection: G 1/4 ... 3/4, 1/4 ... 3/4" NPT female thread
- Accuracy: ± 2.5 % of full scale

DON

Oval Wheel - ...

Aluminium, stainless steel
Pulse- / Analogue Output



Digital Display
...ZOK




Mechanical counter
...M4



High Pressure
...H



- Viscosity range: Up to 1 000 000 cP
- Oil: 0.5 - 36 l/h ... 150 - 2500 l/min
- t_{max} 150 °C; p_{max} 400 bar
- Connection: G 1/8 ... 4 female thread, 1/8" ... 4" NPT female thread, flange DN25 ... 100, ANSI 1 ... 4"
- Accuracy: ± 0.2 ... ± 1 % of reading




DOE

Oval Wheel - Pulse Output (OEM Version)

Stainless steel



- Viscosity range: up to 1000 cP
- Oil: 0.5 - 36 l/h ... 1 - 40 l/min
- Connection: G 1/8, G 1/4, 1/8" NPT, 1/4" NPT female
- Accuracy: ± 1 % of reading




OME

Screw Spindle - Meter

Aluminium



- Viscosity range: 1 - 5000 mm²/s
- Oil: 0.1 - 10 l/min ... 3.5 - 350 l/min
- t_{max} 125 °C; p_{max} 40 bar
- Connection: G 1/2 ... 1 1/2 female thread, flange DN 15 ... 40
- Accuracy: ± 0.1 % of reading





OMG / OMH / OMK

Screw Spindle - ...

Cast iron, stainless steel



- Viscosity range: 1 - 1×10^6 mm²/s
- Oil: 0.1 - 10 l/min ... 50 - 5000 l/min
- t_{max} 200 °C; p_{max} 400 bar
- Connection: G 1/2 ... 6 female thread, flange DN 15 ... 150
- Accuracy: $\pm 0.3\%$ of reading



DZR

Gear Wheel - Meter

Cast iron, stainless steel



- Viscosity range: 20 - 5000 mm²/s
- Oil: 0.008 - 2 l/min ... 3 - 700 l/min
- t_{max} 150 °C; p_{max} 400 bar
- Connection: G 1/8 ... 1 female thread
- Accuracy: $\pm 0.3... \pm 1\%$ of reading



KZA

Gear Wheel - Meter

Aluminium



- Viscosity range: 20 - 4000 mm²/s
- Oil: 0.02 - 4 l/min ... 1 - 200 l/min
- t_{max} 80 °C; p_{max} 200 bar
- Connection: G 1/4 ... 1 female thread
- Accuracy: $\pm 0.3... \pm 3\%$ of reading



KAL - D

Calorimetric - Indicator / Switch

Stainless steel



- Water: 0.04 - 2 m/s
- t_{max} 80 °C; p_{max} 40 bar
- Connection: G 1/4, G 1/2, 1/4" NPT, 1/2" NPT, M12x1



KAL

Calorimetric - Meter / Switch

Stainless steel

Indicator
...K



Meter
...A(K)



- Water: 0.04 - 2 m/s
- t_{max} 120 °C; p_{max} 100 bar
- Connection: G 1/4 ... 1 1/2, 1/4 ... 3/4" NPT, M12, Tri-Clamp®
- Accuracy: $\pm 10\%$ of full scale [A(K)]



KAL / KAL - E

Calorimetric - Meter / Switch

Brass, stainless steel



- Water: 0.04 - 2 m/s
- t_{max} 120 °C; p_{max} 100 bar
- Connection: G 1/4 ... 1 1/2, 1/4 ... 3/4" NPT, M12x1



DVK

Calorimetric - Meter / Switch

Stainless steel



- Air: 1 - 10 NI/min ... 50 - 500 NI/min
- t_{max} 50 °C; p_{max} 15 bar
- Connection: G 1/4 ... 1/2
- Accuracy: $\pm 5\%$ of full scale





Flow Meters / Switches

KAL - L

Calorimetric - Switch

Brass



- Air: 1 - 20 m/s
- t_{max} 120 °C; p_{max} 8 bar
- Connection: G 1/2, Rp 1/2, M18, flange, smooth shaft
- Accuracy: ± 10 % of reading



KAH

Air velocity sensor

Polycarbonate



- Air: 0 ... 10 / 15 / 20 m/s
- Output signal: 0 - 10 V_{DC} or 4 - 20 mA
- Supply voltage: 24 V_{AC/DC}
- Connection: mounting adapter
- Accuracy: $\pm (0.2 \text{ m/s} + 3\% \text{ of reading})$



MAS

Mass - Flow Meter - Thermal

Nylon®, stainless steel



- Air: 0 - 10 Nml/min ... 0 - 500 Nl/min
- t_{max} 50 °C; p_{max} 35 bar
- Connection: 1/4" NPT female thread, Swagelok®
- Accuracy: ± 1.5 % of full scale



DMS

Mass - Meter / Controller - Thermal

Stainless steel



- Air: 0.1 - 3.7 Nml/min ... 0 - 185 Nl/min
- t_{max} 50 °C; p_{max} 35 bar
- Connection: 1/4 ... 1/2" NPT female thread, clamp connection
- Accuracy: ± 1 % of full scale



KMT - 1 / - 2 / - 3

Mass - Flow Meter - Thermal

Stainless steel



- Air: 0.5 - 200 Nm/s
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 1/2 ... 2, 1/2 ... 2" NPT female thread, ball valve
- Accuracy: ± 1.5 % of reading
 ± 0.5 % of full scale



KMT - 4

Mass - Flow Meter - Thermal

Stainless steel



- Air: 0.2 - 200 Nm/s
- t_{max} 80 °C; p_{max} 16 bar
- Connection: R 1/2" male thread for insertion (DN 65 ... DN 700)
- Accuracy: ± 1.5 % of reading
 ± 0.8 % of full scale



KME

Mass - Flow Meter - Thermal

Aluminium



- Air: 0.2 - 76.3 ... 2.2 - 848.2 Nm³/h
- t_{max} 60 °C; p_{max} 16 bar
- Connection: G 1/2 ... 2, 1/2 ... 2" NPT male thread
- Accuracy: ± 3 % of reading
 $+ 0.3$ % of full scale



KEC - 1

Mass - Flow Meter - Thermal

Stainless steel



- Air: 0.1 - 50 ... 0.1 - 224 m/s
- t_{max} 180 °C; p_{max} 100 bar
- Connection: G 1/2, 1/2" NPT male thread, flange DN 15 ... 80
- Accuracy: ± 1.5 % of reading
(Option: ± 1.0 % of reading)
 ± 0.3 % of full scale





KEC-2

Mass-Flow Meter - Thermal

Stainless steel




- Air: 0.1 - 50 ... 0.1 - 224 m/s
- t_{max} 180 °C; p_{max} 40 bar
- Connection: G 1/2 ... 2, 1/2 ... 2" NPT male thread, flange DN 15 ... 80, ANSI 1/2 ... 3"
- Accuracy: $\pm 1.5\%$ of reading (Option: $\pm 1.0\%$ of reading) $\pm 0.3\%$ of full scale



TMU - W

Coriolis Mass

Stainless steel



- Measuring range: max. 4 kg/min H₂ (p_{nom} 1000 bar)
- Temperature range: -40 ... +100 °C (H₂ dispenser -40 ... +55 °C)
- p_{max} up to 1000 bar
- Connection: 6MF 9/16-18 UNF (optional: 1/2" NPT (female); Hofer 7/8")
- Accuracy: $\pm 0.5\%$ actual flowrate \pm zero-point stability (gases)



HPC

Coriolis Mass - Mini

Aluminium, stainless steel




- Measuring range: 0 - 20 kg/h ... 0 - 160 kg/h
- t_{max} 180 °C; p_{max} PN 100/PN 320/PN 400
- Connection: G 1/2, 1/2" NPT, 6/8/10 mm Gyrolok®/Swagelok®
- Accuracy: $\pm 0.1\%$ of reading \pm zero point stability



TMU/UMC-3

Coriolis Mass

Stainless steel, Hastelloy®



- Water: 60 - 600 ... 400 000 - 2 200 000 kg/h
- t_{max} 260 °C; p_{max} PN 40 (up to 750 bar on request)
- Connection: flange DN 10 ... 400, ANSI 1/2 ... 16"
- Accuracy: $\pm 0.1\%$ of reading



TMU/UMC-4

Coriolis Mass

Stainless steel, Hastelloy®



- Water: 60 - 600 ... 400 000 - 2 200 000 kg/h
- t_{max} 260 °C; p_{max} PN 40 (up to 750 bar on request)
- Connection: flange DN 10 ... 400, ANSI 1/2 ... 16"
- Accuracy: $\pm 0.1\%$ of reading



TMU-... AC

Coriolis Mass with Heating

Stainless steel, Hastelloy®



- Water: 60 - 600 ... 400 000 - 2 200 000 kg/h
- t_{max} 260 °C; p_{max} PN 40
- Connection: flange DN 10 ... 400, ANSI 1/2 ... 16"
- Accuracy: $\pm 0.1\%$ of reading



KPL

Orifice Plate - Differential Pressure

Steel, stainless steel, Hastelloy® C, titanium, Monel®, tantalum



- Ranges: for liquids, gases, steam according to ISO 5167 - 1
- Connection: DN 50 ... 600, ANSI 2 ... 24"
- t_{max} 500 °C; p_{max} PN 420/cl. 2500





Flow Meters / Switches

KPL - B / - F

Orifice Plate - Differential Pressure

Steel, stainless steel, Hastelloy® C, titanium, Monel®, tantalum



- Ranges: for liquids, gases, steam according to ISO 5167 - 1
- Connection: DN 50 ... 600, ANSI 2 ... 24"
- t_{max} 500 °C; p_{max} PN 420/cl. 2500



ANU

Pitot Tube - Differential Pressure

Stainless steel



- Connection: G 1 ... 1½, 1 ... 1½" NPT, DN 25 ... 80, ANSI 1 ... 3"
- Probe length: 50 ... 8000 mm (2 ... 315")
- t_{max} 1175 °C; p_{max} 400 bar



DUS

Nozzle - Differential Pressure

Steel, stainless steel



- Nominal diameter: DN 50 ... 600 (2 ... 24")
- t_{max} 560 °C; p_{max} 420 bar



DVT

Venturi tube - Differential Pressure

Steel, stainless steel



- Nominal diameter: DN 50 ... 1200 (2 ... 48")
- t_{max} 560 °C; p_{max} 420 bar



RCD

Venturi Nozzle - Differential Pressure

Brass, stainless steel

Pointer Indicator ...Z



Compact Electronic ...C3



Digital Display ...K



- Water: 0.5 - 3.3 ... 300 - 2350 l/min
- Air: 0.5 - 5.35 ... 300 - 2750 Nm³/h
- t_{max} 100 °C; p_{max} PN 40
- Connection: G ½ ... 3, ½ ... 3" NPT female thread
- Accuracy: \pm 3 % of full scale



MIK

Magnetic Inductive - ...

PPS/stainless steel, PVDF/Hastelloy®, PPS/Hastelloy®, PVDF/tantalum

Pulse Output ...F3

Analogue Output ... L4 + AUF

Compact Electronics ...C3

Counter ...E

Dosing Electronics ...G

- Water: 10 - 500 ml/min ... 35 - 700 l/min
- t_{max} 80 °C; p_{max} 10 bar
- Connection: G ½ ... 2¾ male thread
- Accuracy: \pm 2 % of full scale





MIM

Magnetic Inductive - All-Metal Design

Stainless steel



IO-Link



- Water: 10 - 1000 ml/min ... 3 - 650 l/min
- t_{max} 140 °C; p_{max} 16 bar
- Connection: G 1/2 ... 2 male thread, NPT
- Accuracy: $< \pm (0.8\% \text{ of reading} + 0.5\% \text{ of full scale})$



-40 ... 140 °C

MIS

Magnetic Inductive - All-Metal Design

Lining: hard rubber, soft rubber, PTFE/PFA, EPDM, ceramics



IO-Link



- Water: 0 - 10 m/s
- t_{max} 70 ° (130 °C); p_{max} 16 bar
- Connection: DN 80 ... 200, ANSI 3 ... 8" (larger on request)
- Accuracy: $< \pm (0.5\% \text{ of reading} + 0.5\% \text{ of full scale})$



PIT

Magnetic Inductive - Insertion

Stainless steel/PTFE- or PFA-lining



- Water: 0.5 - 5 m/s or 1 - 10 m/s
- t_{max} 140 °C; p_{max} PN 40
- Connection: flange DN 40 ... 80, ANSI 2 ... 3", for pipelines DN 125 ... 2000
- Accuracy: $\pm 1.5\%$ of reading $\pm 0.5\%$ of full scale
- IP 68



PITe

Magnetic Inductive - Insertion

Stainless steel



- Water: 1 - 10 m/s
- t_{max} 100 °C; p_{max} PN 16
- Connection: weld-on nozzle $\varnothing 40$ mm, sensor with union nut M52 x 2 for pipelines DN 50 ... 400, ANSI 2 ... 16"
- IP 68
- Accuracy: $\pm 1.5\%$ of reading



EPS

Magnetic Inductive

Lining: hard rubber, soft rubber, PTFE/PFA, EPDM, ceramics



- Water: 1 - 10 m/s
- t_{max} 150 °C; p_{max} PN 40
- Connection: flange DN 15 ... DN 1200, ANSI 1/2 ... 48", wafer type DN2 ... DN10, ANSI 1/2 ... 3/8", sanitary DN10 ... DN100, ANSI 3/8 ... 4"
- Accuracy: $\pm 0.3\%$ of reading





Flow Meters / Switches

DVH

Vortex - Meter

Stainless steel



- Water: max. 9.2 m/s
- Air/steam: max. 92 m/s
- t_{max} 400 °C; p_{max} PN 100
- Connection: DN 15 ... 300, ANSI 1/2 ... 12"
- Option: integrated temperature and pressure sensor, wafer type
- Accuracy: $\pm 0.7\%$ of reading (water)
 $\pm 1\%$ of reading (gas/steam)



DVE

Vortex - Meter - Insertion Version

Stainless steel



- Water: max. 9 m/s
- Air/steam: max. 30 m/s
- t_{max} 400 °C; p_{max} PN 100
- Connection: 2" NPT, DN 50, ANSI 2" mountable in NW 50 ... NW 600
- Option: integrated temperature and pressure sensor, Installation/removal device
- Accuracy: $\pm 1.2\%$ of reading (water)
 $\pm 1.5\%$ of reading (gas/steam)



DVZ

Vortex - Compact...

PPS/brass, PPS/stainless steel

Pulse Output ...F3

Analogue Output ...L / ...L4 + AUF

Compact Electro. ...C3

Counter ...E

Switch ...S3

Dosing Electronic ...G

- Water: 0.5 - 4.5 l/min ... 10 - 100 l/min
- t_{max} 80 °C; p_{max} 20 bar
- Connection: G 1/4 ... 1, 1/4 ... 1" NPT
- Accuracy: $\pm 2.5\%$ of full scale



DOG - 4 / DOG - 6

Oscillation - Meter / Switch

Stainless steel



- Air: 0.12 - 12 m³/h ... 60 - 6000 m³/h
- Pressure drop: max. 50 mbar
- t_{max} 120 °C (for EX 60 °C); p_{max} PN 40
- Connection: flange DN 25 ... 200, ANSI 1 ... 8"
- Accuracy: $\pm 1.5\%$ of reading
- Analogue output
- Pulse output, counter, flow computer

* Sponsored by the Federal Ministry of Economics and Technology on the basis of a resolution of the German Bundestag



DUC

Ultrasonic Flowmeter - Clamp on

Stationary · portable



- Media: ultrasonic conducting liquids
- Temperature measuring range: -40 ... 150 °C
- Flow velocities: 0 ... ± 30 m/s
- Pipe sizes: DN 10 ... DN 6000
- For the most common or sound-conducting materials like steel and plastics
- Heat quantity measurement
- Accuracy: up to 1%





DUK

Ultrasonic - ...

Brass, stainless steel

Pulse Output
...F3

Analogue Output
... L4 + AUF

Compact Electro.
...C3

Digital Display
...K

Switch
...S3

Counter/Dosing
...E/G


- Water: 0.08 - 20 l/min ... 2.5 - 630 l/min
- t_{max} 90 °C; p_{max} 16 bar
- **Turndown 250:1**
- Connection: G 1/2 ... 3 female thread
- Accuracy: $\pm 0.7\%$ of full scale
 $\pm 0.7\%$ of reading



REG

Flow Restrictor

Brass, stainless steel



- Water: 0.5 - 560 l/min
- t_{max} 300 °C; p_{max} 200 bar
- Connection [single element]:
G 1/2, G 3/4, 3/4" NPT
- Connection [multiple elements]:
G 1 1/2 ... 2 1/2 flange DN 20 ... 100



DAA / DAH

Flow Indicator with Rotor

Brass, stainless steel



- Water: 0.4 - 4 l/min ... 8 - 100 l/min
- t_{max} 180 °C; p_{max} 16 bar
- Connection: G 1/4 ... 1 1/2,
1/4 ... 1 1/2" NPT female thread



DAF - 1 / - 2

Flow Indicator with Rotor

Brass, stainless steel



- Water: 0.03 - 0.1 l/min ... 5 - 150 l/min
- t_{max} 110 °C; p_{max} 16 bar
- Connection: G 1/8 ... 1 1/2,
1/8 ... 1 1/2" NPT female thread,
flange DN 15 ... 50, ANSI 1/2 ... 2"



DKF

Flow Indicator with Rotor

Brass



- Water: 0.14 - 2 l/min ... 1.8 - 83 l/min
- t_{max} 120 °C; p_{max} 6 bar
- Connection: G 1/8 ... 1,
1/8 ... 1" NPT female thread



DIH

Flow Indicator with Rotor

Brass, stainless steel, POM



- Water: 0.2 - 0.5 l/min ... 1 - 50 l/min
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 3/8, G 1 female thread,
3/8" NPT, 1" NPT





Flow Meters/Indicators

DIG

Flow Indicator with Rotor

PP, brass, stainless steel



- Water: 0.5 - 12 l/min ... 3 - 80 l/min
- t_{max} 80 °C; p_{max} 16 bar
- Connection: G 1/8 ... 1, 1/8 ... 1" NPT female thread



DAR-1/-2

Flow Indicator with Rotor

Grey cast iron, cast steel, stainless steel



- t_{max} 260 °C; p_{max} 40 bar
- Connection: G 1/4 ... 2, 1/4 ... 2" NPT female thread, flange DN 15 ... 200, ANSI 1/2 ... 8"



DAI

Sight glass flow indicator with rotor, flap, chain or ball

Carbon steel, stainless steel, PVC, PP, PVDF



- t_{max} 260 °C; p_{max} 40 bar
- Connection: G 1/2 ... 3, 1/2" ... 3" NPT, DN 15 ... DN 200, ANSI 1/2" ... 8"



DAZ

Flow Indicator with Flap

Red cast iron



- Water/oil: 2.1 - 17 l/min ... 2.1 - 24 l/min
- t_{max} 200 °C; p_{max} 16 bar
- Connection: G 1/2 ... 1 female thread



DAB

Flow Indicator with Ball

Red cast iron



- t_{max} 100 °C; p_{max} 6 bar
- Connection: G 3/4 ... 2 female thread



DKB

Flow Indicator with Ball

Brass, stainless steel



- Water: 0.05 - 15 l/min ... 0.14 - 105 l/min
- t_{max} 200 °C; p_{max} 16 bar
- Connection: G 1/8 ... 1 1/2, 1/8 ... 1" NPT female thread



UFJ

Flow Indicator - Sight Glass

Stainless steel, PVC



- t_{max} 100 °C; p_{max} 6 bar
- Connection: G 1/4 ... 1 1/2 female thread





MAN - R

Bourdon Tube Pressure Gauges - ...

Brass, stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +1 000 bar
- Housing: Ø 63, 80, 100, 160 mm
- Overload protected: 1.15 - 1.3 times
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: cl. 1.0; 1.6



MAN - R...S

Bourdon Tube Pressure Gauges for Exceptional Safety

Stainless steel



- Measuring range: -0.6 ... 0 bar ... 0 ... +1 000 bar
- Housing: Ø 63, 100, 160 mm
- Overload protected: 1.3 times
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: cl. 1.0
- Contact (NG100+160): up to 4 times (NG100 also for „Exceptional Safety“)
- Option: application specific design



MAN - T

Bourdon Tube - Refrigeration

Brass, stainless steel



- Measuring range: -1 ... +9 bar ... -1 ... +40 bar
- Housing: Ø 63, 80, 100 mm
- Overload protected: 1.3 times
- Connection: 7/16-20 UNF, G ¼ male thread
- Accuracy: cl. 1.0; 1.6



MAN - K

Capsule Element Pressure Gauges

Brass, stainless steel



- Measuring range: -10 ... 0 mbar ... 0 ... +600 mbar
- Housing: Ø 63, 80, 100, 160 mm
- Overload protected: 1.3 - 10 times
- Connection: G ¼, G ½ male thread
- Accuracy: cl. 1.6



MAN - P

Diaphragm Pressure Gauges

Stainless steel



- Measuring range: -16 ... 0 mbar ... 0 ... +40 bar
- Housing: Ø 100, 160 mm (Option: aluminium)
- Overload protected: 1.3 times
- Option: Overpressure 4 times, 10 times (max 40 bar)
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread, DIN/ANSI flange, DIN 11851
- Accuracy: cl. 1.6
- Contact: upto 4 times
- Option: application specific design



MAN - C

Diaphragm Pressure Gauges - Chemistry

Stainless steel



- Measuring range: -25 ... 0 mbar ... 0 ... +25 bar
- Housing: Ø 100 mm, 160 mm
- Overload protected: 1.3 times
- Connection: DIN, ANSI flange
- Accuracy: cl. 1.6
- Wetted parts ECTFE, PTFE



MAN - ZF

Pressure Transducer - Chemistry

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +600 bar
- Housing: Ø 100 mm
- Overload protected: 0.9 - 1.0 times
- Connection: G ½ male thread analogue output 4 - 20mA
- Power supply: 13 - 30 V_{DC}
- Accuracy: cl. 1.0



MAN - N...S

Bourdon Tube Pressure Gauges - Exceptional Safety

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +1000 bar
- Housing: Ø 63, 80, 100, 160 mm
- Overload protected: 1.15 - 1.3 times
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: cl. 1.0; 1.6





Pressure Measurement

MAN - SC

Previous model MAN-SD still available

Digital Pressure Gauge - Battery Powered

Stainless steel/PA glass fibre reinforced



Display rotatable in 90° steps

360°

- Measuring range: -0.6... 0 bar ... 0 ... +1 600 bar
- Fitting: Ø 80 mm
- Display: 5-digit LC-Display
- Overload protected: 1.5 - 3 times
- Connection: G ¼, G ½, ½" NPT, ½" NPT male
- Power supply: battery 9V
- Accuracy: cl. 0.5
- Tare function, touch pads, peak value memory, protective rubber sleeve (optional)



MAN - LC

Previous model MAN-LD still available

Digital Pressure Gauge with IO-Link

Stainless steel/PA glass fibre reinforced



Display rotatable in 90° steps

360°

IO-Link

- Measuring range: -0.6... 0 bar ... 0 ... +1 600 bar
- Housing: Ø 80 mm
- Display: LC-Display
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male
- Power supply: 24 V_{DC}
- Accuracy: cl. 0.5
- Tare function, touchpads, peak memory, rubber protection sleeve
- User configurable outputs option (upto 2 relay outputs possible)



PUM

U-Pipe Pressure Gauges

Glass



- Measuring range: -250...+250...-1500...+1500 mmWC
- Scale graduation: 2 mm
- Hose connection: Ø 7 mm
- Accuracy: ±0.2 mbar



MAN - U

Differential Pressure Gauge with double diaphragm

Stainless steel



- Measuring range: 0...+250 mbar...0...+25 bar
- Static pressure on both sides: 200 bar
- Housing: Ø 100 mm, 150 mm
- Connection: G ½, ½" NPT male, ¼" NPT female
- Accuracy: cl. 1.6



MAN - Q

Bourdon Tube Pressure Gauge

Brass, stainless steel



- Measuring range: -0.6... 0 bar ... 0 ... +1000 bar
- Housing: 96x96, 144x144 mm
- Overload protected: 1.3 times
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: cl. 1.0
- Contact: upto 3 times
- Option: application-specific versions



MAN - R HEAVY DUTY

Bourdon Tube Pressure Gauge

Brass, stainless steel



- Measuring range: -600... 0 bar ... 0 ... +1000 bar
- Housing: Ø 100, 160 mm
- Overload protected: 1.3 times (Option multiple)
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: cl. 1.0
- Contact: upto 4 times
- Option: application-specific versions
- Torsion-free + impact-resistant housing



MAN - DG12R

Differential Pressure Gauge with Bourdon Tube

Aluminium, steel



- Measuring range: 0...+1 bar...0...+60 bar
- Housing: Ø 160 mm
- Overload protected: 1.3 times - (short time)
- Connection: G ½ male thread
- Option: Contact
- Accuracy: cl. 1.6



HND - P215 / - P126, - P236

Hand-Held Pressure Measuring Device for Differential Pressure, 2 Sensors (Internal/External)



- Measuring range: +2.5 mbar ... +1000 bar depending on sensor
- Accuracy: ±0.1 % of full scale
- Measuring range: -100 ... +2000 mbar
- Accuracy: ±0.2 % of full scale
- Option: alarm, real-time clock





PMP

Differential Pressure Sensor - Thin Film



- Measuring range: 0 ... +50 mbar
- Power supply: 24 V_{AC/DC}, 110 V_{AC}, 230 V_{AC}
- Display: 4-digit LED
- Connection: hose connection 6 x 8 mm



PAD

Differential Pressure Transmitter

Stainless steel, Monel®, tantalum, Hastelloy®



- Measuring range: +0.75 mbar ... 413.70 bar
- Power supply: 12 ... 45 V_{DC}
- Connection: ¼" NPT
- Accuracy: ±0.075 % of measuring span



MAN - F

Test Pressure Gauge with Bourdon Tube

Aluminium, brass, stainless steel



- Measuring range: -0.6 ... 0 bar ... 0 ... +2500 bar
- Housing: Ø 160, 250 mm
- Overload protected: 0.9 - 1.3 times
- Connection: G ½ male thread
- Accuracy: cl. 0.25; 0.6



MAN - RF ... D

Pressure Gauge with Membrane Diaphragm Seal

Stainless steel



- Measuring range: -1 ... 3 bar ... 0 ... +40 bar
- Housing: Ø 100 mm
- Connection: flange Ø 85 mm, LK 70 mm
- Accuracy: cl. 1.6
- Contact: upto 4 times
- Accessories: Weld-on flange, screw and gasket set
- Option: vibration damping, application-specific designs



DRM

Diaphragm, Capsule, Inline, Membrane Chemical Seals

Stainless steel, tantalum, ECTFE



- Measuring range: 0 ... +0.6 bar ... 0 ... +1600 bar
- Filling: glycerine, paraffin- and silicone oil
- Connection: G/NPT/M-thread G ¼ ... G 1½ male thread, DIN, ANSI
- Diverse thread and flange connection, Tri-Clamp®, DIN 11851, SMS- and IDF-Norm
- Option: application-specific versions



DRM

Flange Diaphragm Seals

Stainless steel, Monel®, tantalum, Hastelloy®, PTFE



- Standard version up to 350 °C / 40 bar: DN25 ... DN100, ANSI 1 ... 4"
- Special version up to 400 bar: up to DN200, ANSI 8"
- Flanges according to BS, JIS and GOST Standard
- All possible also with extended diaphragm



MAN - RF ... DRM - 600

Bourdon Tube Pressure Gauge + Membrane Diaphragm

Stainless steel



- Measuring range: 0 ... +4 bar ... 0 ... +1600 bar
- Housing: Ø 63, 100, 160 mm
- Connection: G/NPT/M-thread G ¼ ... G 1½ male thread
- Accuracy: cl 1.6 (NG63 = 2.5)
- Option: application-specific versions



MAN - RF ... MZB - 711 ... DRM

Pressure Gauge + Diaphragm Seal upto 350°C

Stainless steel



- Measuring range: 0 ... +4 bar ... 0 ... +600 bar
- Housing: Ø 63, 100, 160 mm
- Connection G/NPT/M-thread G ¼ ... G 1½ male thread, DIN, ANSI, Tri-Clamp®, DIN 11851, SMS/IDF-Norm
- Accuracy: cl 1.6 (NG63 = 2.5)
- Contact (NG100+160): upto 4 times
- Option: application-specific versions





Pressure Measurement

MAN - RF ... M1 ... DRM - 620

Pressure Gauge with Membrane Diaphragm

Stainless steel



- Measuring range: 0 ... +1 bar ... 0 ... +40 bar
- Housing: Ø 100, 160 mm
- Diverse thread and flange connection, Tri-Clamp®, DIN 11851, SMS- and IDF-Norm
- Accuracy: cl. 1.6



MAN - RF ... DRM - 502

Pressure Gauge with In-Line Diaphragm

Stainless steel



- Measuring range: +1.6 ... +40 bar ... +2.5 ... +40 bar
- Housing: Ø 100, 160 mm
- Connection: Tri-Clamp® ½ ... 2", hygienic connection ISO DN 15 ... 50
- Accuracy: cl. 1.6



MAN - RF ... M21 ... DRM - 602

Cont. Pres. Gauge + Membrane Diaphragm Seal DIN 11851

Stainless steel



- Measuring range: 0 ... +1 bar ... 0 ... +40 bar
- Housing: Ø 100, 160 mm
- Connection: DIN 11851 DN 20 ... 100
- Accuracy: cl. 1.6



MAN - RF ... DRM - 603

Pressure Gauge + Membrane Diaphragm Seal, DIN 11851

Stainless steel



- Measuring range: 0 ... +1 bar ... 0 ... +40 bar
- Housing: Ø 100 mm
- Connection: DIN 11851 DN 25 ... 100
- Accuracy: cl. 1.6



MAN - RF ... DRM - 613

Pressure Gauge + Diaphragm Seal Clamp Connection

Stainless steel



- Measuring range: 0 ... +2.5 bar ... 0 ... +10 bar
- Housing: Ø 100 mm
- Connection: Tri-Clamp® 1 ... 3"
- Accuracy: cl. 1.6



MAN - RF ... P21 ... DRM - 600

Cont. Pressure Gauge + Membrane Diaphragm

Stainless steel



- Measuring range: 0 ... +160 bar ... 0 ... +800 bar
- Housing: Ø 100 mm
- Connection: Diaphragm seal thread G ¾ male thread
- Silicone-free
- Accuracy: cl. 1.6
- Contact: Pneumatic, magnetic spring contact
- Option: application-specific versions



MAN - SD ... DRM - 189

Digi. Press. Gauges + Diaphragm Seals (f. homogenizing mach.)

Stainless steel




- Measuring range: 0 ... +100 bar ... 0 ... +1000 bar
- Housing: Ø 80 mm
- Membrane: flush mounted
- Connection: for block flange/thread
- Accuracy: cl. 1.0
- Tara function, touchpads, peak memory



SEN ... DRM - 600

Pressure Sensor with Diaphragm Seal

Stainless steel



- Measuring range: 0 ... +6 bar ... 0 ... +600 bar
- t_{max} 70 °C
- Connection: G ½ ... G 1 ½ male, stainless steel
- Option: Plug-on Display
- Accuracy: cl. 1.0





SEN... DRM - 189

Press. Sensor + Diaphragm Seals (for homogenizing machines)

Stainless steel



- Measuring range: 0 ... +100 bar ... 0 ... +1000 bar
- Membrane: flush mounted
- t_{max} 100 °C
- Connection: for block flange/thread
- Option: Plug-on Display
- Accuracy: cl. 1.0



MAN - SC... DRM - 630

Digi. Pressure Gauge + Membrane Diaphragm Seal

PVC



- Measuring range: 0 ... +1.6 bar ... 0 ... +10 bar
- Housing: Ø 80 mm
- Connection: G ¼, G ½, ½" NPT female
- Accuracy: cl. 1.0
- Tara function, touchpads, peak memory



MAN - RD... DRM - 632

Pressure Gauge with Membrane Diaphragm Seal PVDF

PVDF




- Measuring range: 0 ... +1.6 bar ... 0 ... +16 bar
- Housing: Ø 63 mm
- Connection: G ¼, G ½, ½" NPT female
- Accuracy: cl. 2.5



SEN - 86 + AUF, KUG - S

Pressure Sensor + Process Assembly

Brass, stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +25 bar
- Overload protected: 1.5 - 2 times
- Connection: G ½ male thread
- Option: Plug-on Display
- Accuracy: cl. 0.5; 1.0



PDA

Pressure Sensor with Ceramic Cell

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +700 bar
- t_{max} 80 °C
- Display: 3-digit LED
- Connection: G ¼, G ½, ¼" NPT, ½" NPT male thread
- Accuracy: $\pm 0.5 \dots \pm 1\%$ of full scale



PAS

Pressure Transmitter

Stainless steel, Hastelloy®-C, tantalum



- Measuring range: -1 ... +600 bar
- Power supply: 12 ... 45 V_{DC}
- Connection: ½" NPT female
- Accuracy: $\pm 0.075\%$ of calibrated span



PAS... N

Pressure Transmitter with Diaphragm Seal

Stainless steel, Monel®, tantalum, Hastelloy®, PTFE



- Measuring range: 0 ... +250 mbar ... 0 ... +600 bar
- t_{max} 200 °C
- Connection: thread or with flange (nominal size 15 ... 100)
- Accuracy: $\pm 0.075\%$ of calibrated span + influence of diaphragm seal



PAS... N

Pressure Transmitter with Diaphragm Seal

Stainless steel, Monel®, tantalum, Hastelloy®, PTFE



- Measuring range: 0 ... +250 mbar ... 0 ... +600 bar
- t_{max} 350 °C
- Connection: thread or flange (nominal size 15 ... 100)
- Accuracy: $\pm 0.075\%$ of calibrated span + influence of diaphragm seal






Pressure Measurement

SEN - 8

Pressure Sensor with Ceramic Cell

Stainless steel



- Measuring range: 0 ... +0.6 bar ... 0 ... +800 bar
- t_{max} 85 °C (Option: t_{max} 125 °C)
- Connection: G 1/4 ... G 2, NPT, 7/16 UNF
- Overload protected: 1.2 - 2 times (max. 800 bar)
- Accuracy: cl. 0.5
- Output: 4 ... 20 mA, 0 ... 10 V
- Cable and plug connection (IP65 to IP68)
- Option: plug-on Display, absolute pressure, application-specific versions



SEN - 8

Pressure Sensor with Ceramic Cell

Stainless steel



- Measuring range: 0 ... +0.6 bar ... 0 ... +800 bar
- t_{max} 85 °C (Option: t_{max} 125 °C)
- Connection: G 1/4 ... G 2, NPT, 7/16 UNF
- Overload protected: 1.5 - 8 times (max. 800 bar)
- Accuracy: cl. 0.5
- Output: 4 ... 20 mA, 0 ... 10 V
- Cable and plug connection (IP65 to IP68)
- Option: Heavy Duty (plug protection), application-specific versions



SEN - 96

Pressure Sensor with Ceramic Cell

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +600 bar
- Overload protected: 1.3 - 5 times
- Connection: G 1/4, 1/2, 1/4" NPT, 1/2" NPT male thread
- Option: Plug-on Display
- Accuracy: $\leq \pm 0.5\%$ of full scale



SEN - 98 / - 99

Pressure Sensor with Ceramic Cell

Stainless steel




- Measuring range: -1 ... 0 bar ... 0 ... +600 bar (rel)
0 ... 1 bar ... 0 ... +25 bar (abs)
- Overload protected: 1.3 - 5 times
- Connection: G 1/4, 1/2, 1/4" NPT, 1/2" NPT male thread
- Option: Plug-on Display
- Accuracy: $\pm 0.5\%$ of measuring range



SEN - 3276, - 3277

Pressure Sensor - Piezoresistive

Stainless steel




- Measuring range: -1 ... 0 bar ... 0 ... +25 bar
- Membrane: internal
- Overload protected: 2 - 3.5 times
- Connection: G 1/4, 1/2, 1/4" NPT, 1/2" NPT male thread
- Option: Plug-on Display, absolute pressure
- Accuracy: cl. 0.25; 0.5
- Oil-, fat free
- LABS-free



SEN - 3251, - 3252

Pressure Sensor Industrial Piezoresistive - Flush Mounted

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +25 bar
- Membrane: flush mounted
- Overload protected: 2 - 3.5 times
- Connection: G 1/2, G 1 male thread
- Option: Plug-on Display
- Accuracy: cl. 0.25; 0.5
- Absolute pressure
- Oil-, fat free
- LABS-free



SEN - 3376, - 3377

Pressure Sensor Industrial Thin Film

Stainless steel



- Measuring range: 0 ... +40 bar ... 0 ... +1000 bar
- Membrane: flush mounted
- Overload protected: 1.5 - 3 times
- Connection: G 1/4, 1/2, 1/4" NPT, 1/2" NPT male thread
- Option: Plug-on Display, absolute pressure
- Accuracy: cl. 0.25; 0.5



SEN - 3344, - 3386

Pressure Sensor Piezoresistive/Thin Film - Flush Mounted

Stainless steel



- Measuring range: 0 ... +40 bar ... 0 ... +600 bar
- Membrane: flush mounted
- Connection: G 1/2 male thread
- Option: Plug-on Display
- Accuracy: cl. 0.25; 0.5





HND

Pressure Hand-Held Unit - ...

for External Sensors
... -P210, -215



with 2 Integrated Sensors
... -P121, -123, -126



with 1 Integrated Sensor
... -P129, -P239



- Measuring range: -1.999 ... +2.5 mbar ... 0 ... +1000 bar (sensor dependent)
- Accuracy: $\pm 0.1\%$ of full scale
- Measuring range: -1 ... +25 mbar ... -100 ... +2000 mbar
- Accuracy: $\pm 0.2\%$ of full scale
- Measuring range: 0 ... +1300 mbar (abs)
- Accuracy: $\pm 0.2\%$ of full scale
- Option: logger, alarm



PDD

Pressure Switch with Ceramic Cell

Stainless steel



- Measuring range: -1 ... 0 bar ... 0 ... +700 bar
- t_{max} 80 °C
- Display: 3-digit LED
- Overload protected: 1.5 - 3 times
- Connection: G 1/4, G 1/2, 1/4" NPT, 1/2" NPT male thread
- Accuracy: $\pm 0.5\% \dots \pm 1\%$ of full scale

PSD

Electronic Pressure Switch - Thin Film on Steel

Stainless steel



- Measuring range: -1 ... +1.5 bar ... 0 ... +600 bar
- Display: 4-digit LED
- Connection: G 1/4 male thread, others with adapter
- Accuracy: $\pm 0.5\%$ of full scale



SCH - 27 / - 28

Differential Pressure Switch - Mechanical Switch

Stainless steel



- Switching range: 0.7 ... 6 mbar ... 8 ... 160 bar
- Switching range: 0.1 ... 1 bar ... 0.2 ... 10 bar
- Switching function: micro switch
- Connection: 1/2" NPT female, 1/4" NPT female, 1/2" NPT male, G 1/2 male
- Repeatability: < 1% of switching point



MZB - 712 / ...

Accessories for Elec. Press. Switch - Thin Film on Steel

Stainless steel



- Connection: G 1/2, 1/4", 3/8" male thread or NPT, 7/16-20 UNF DIN 3866, G 1/2 DIN 3852-E, M 20 x 1.5



MZB

Pressure Gauges Accessories

Brass, steel, stainless steel



Shut off cocks and valves, syphons, cooling elements, throttle and overpressure protection equipment, adapters



AUF

Plug-On Display



- Input: 4 - 20 mA ; 2-wire or 3-wire
- 4-digit red LED, without additional power supply
- Option: Open-Collector, various colours





Level Switches

M

Float Magnet Switch

Brass, stainless steel, PVC, PPH, PVDF



- Density: min. 0.5 kg/dm³
- t_{max} 150 °C; p_{max} 100 bar
- Connection: thread G/NPT, flange DIN/ANSI



MS

Float Magnet Switch

Brass, stainless steel, PVC, PPH, PVDF



- Density: min. 0.6 kg/dm³
- t_{max} 150 °C; p_{max} 100 bar
- Connection: thread G/NPT, flange DIN/ANSI



NBA/NBE

Float Bypass Switch

Aluminium, stainless steel



- Density: min. 0.65 kg/dm³
- t_{max} 150 °C; p_{max} 10 bar
- Connection: G 3/8 female thread, R 1/2 male thread



NKP

Level Switch - Plastic

Polypropylene, PVDF



- Density: min. 0.6 kg/dm³
- t_{max} 100 °C; p_{max} 10 bar
- Connection: G 1/2, 1/2" NPT, M 16



RFS

Float Switch

Stainless steel



- Density: min. 0.7 kg/dm³
- t_{max} 120 °C; p_{max} 10 bar
- Connection: 1/2" NPT male thread



NV

Float Switch

Brass, stainless steel



- Density: min. 0.7 kg/dm³
- t_{max} 110 °C; p_{max} 16 bar
- Connection: G 3/4 male, M27 x 1.5 male



NSP-S/-K

Float Switch

Polypropylene, TPK



- Density: min. 0.6 kg/dm³
- t_{max} 85 °C; p_{max} 2 bar
- Connection: cable



NAB

Float Switch

Polypropylene



- Density: 0.5 ... 1.15 kg/dm³
- t_{max} 85 °C; p_{max} 3,5 bar
- Connection: cable





NSM

Float Switch

Polypropylene



- Density: min. 0.6 kg/dm³
- t_{max} 95 °C; p_{max} 3 bar
- Connection: cable



NEC

Float Switch

Polypropylene, Hypalon®



- Density: 0.7 ... 1.15 kg/dm³
- t_{max} 85 °C; p_{max} 4 bar
- Connection: cable



NST

Float Switch

PTFE



- Density: min. 0.79 kg/dm³
- t_{max} 150 °C; p_{max} 1 bar
- Connection: cable



NSE

Float Switch

Stainless steel



- Density: min. 0.8 kg/dm³
- t_{max} 150 °C; p_{max} 15 bar
- Connection: G ½ male thread



NGS

Dual Magnet Float Switch

Stainless steel



- Density: min. 0.7 kg/dm³
- t_{max} 250 °C; p_{max} 25 bar
- Connection: square box flange, DIN-flange, DN80/100, BSP 2", 2" NPT



NES

Conductive Switch

Stainless steel, Hastelloy®, titanium/Coating: polypropylene, PTFE



- t_{max} 150 °C; p_{max} 30 bar
- Connection: G ½, G 1 ½ male thread



NEH

Conductive Suspended Electrodes

Stainless steel, Hastelloy®, titanium, rubber hose, PVC, PTFE



- Cable: rubber hose, PTFE
- t_{max} 150 °C; p_{max} 6 bar
- Connection: G ½, G 1 ½ male thread



NEW

Conductive Switch § 19 WHG

Stainless steel, Hastelloy®, titanium/Coating: PTFE



- t_{max} 60 °C; p_{max} atmospheric
- Connection: G 1, G 1 ½ male thread





Level Switches

NEK

Conductive Switch

PP, PPS



- t_{max} 85 °C; p_{max} 20 bar
- Connection: R 3/4 male, 3/4" NPT male
- Open-Collector or relay



LNK

Conductive Switch

Stainless steel, PEEK



- Measuring range: 4 - 1500 mm
- t_{max} 100 °C (150 °C for CIP); p_{max} 10 bar
- Connection: G 1/2 male, G 1 male, hygienic installation system LZE
- Open-Collector



LNK-K

Conductive Switch Compact Probe

Stainless steel, PEEK



- Measuring range: 4 - 1500 mm
- t_{max} 150 °C; p_{max} 10 bar
- Connection: G 1/2 male, hygienic installation system LZE
- Open-Collector



NE - 104 / - 304

Electrode Relays for Conductive Switches



- max 2 limit contacts or
- max 2 Min/Max control switches
- Switch capacity: max. 250 V_{AC}, 5 A, 600 VA



NE - 204

Electrode Relay § 19 WHG



- 1 limit contact
- Switch capacity: max. 250 V_{AC}, 5 A, 600 VA



NE - 5048

Electrode Relays for Conductive Switches



- 1 limit signal or 1 min/max controller
- Supply: 24...240 V_{AC}/V_{DC}
- Switch capacity: max. 250 V_{AC}, 8A, 2000 V_{AC} (AC), 240 W (DC)



LNM

Microwave - Switch (for liquids)

Stainless steel, PEEK



- t_{max} 100 °C (150 °C for CIP); p_{max} 10 bar
- Connection: G 1/2 male thread, hygienic installation system LZE
- Open-Collector



LNZ

Capacitive Switch (for liquids)

Stainless steel, PEEK



- t_{max} 100 °C (150 °C for CIP); p_{max} 10 bar
- Connection: G 1/2 male thread, hygienic installation system LZE
- Open-Collector






NCW

Capacitive Switch (for liquids)

Stainless steel, PVDF



- t_{max} 200 °C; p_{max} 30 bar
- Connection: G 1, G 2 male thread, adapter: G 1¼, G 1½, weld-in sleeve
- 1 relay, SPDT



NWS

Vibration Switch (for liquids)

Stainless steel



- t_{max} 130 °C (150 °C for CIP); p_{max} 45 bar
- Viscosity: max. 5000 mm²/s
- Connection: R- / NPT-thread, DIN- / ANSI-flange, Tri-Clamp®, DIN 11851, DIN 11864, DRD



NSV

Vibration Switch (for bulk materials)

Stainless steel



- Switching range: 230 - 3000 mm
- Density: 0.06 kg/dm³
- t_{max} 80 °C; p_{max} 25 bar
- Connection: G 1½ male thread
- 1 relay, SPDT



NVI

Vibration Switch (for bulk materials)

Stainless steel, PE-coating for cable



- Probe length: up to 20 m
- Density: 0.05 kg/dm³
- t_{max} 160 °C; p_{max} 25 bar
- Connection: G 1½, 1½" NPT male thread
- 1 relay, SPDT



OPT

Optical Switch (for liquids)

Polypropylene, stainless steel, sensor: polysulfone



- t_{max} 80 °C; p_{max} 10 bar
- Connection: G ½, ½" NPT male thread or M 14 with bulkhead nut
- Open-Collector



NMF

Diaphragm Switch (for bulk materials)

Neoprene®, FPM, steel, stainless steel



- t_{max} 200 °C; p_{max} 1 bar (over-pressure secure)
- Connection: flange





Level Switches / Meters

NIR - 9 / NIR - E9

Rotation Vane Switch (for bulk materials)

Stainless steel



- Measuring range: 65 - 1000 mm
- t_{max} 200 °C; p_{max} 0.5 bar
- Connection: G 1 male thread, adapter: G 1¼, G 1½, round flange, weld-in sleeve
- 1 relay, SPDT

NSC

Capacitive Level Switch (for bulk materials)

Stainless steel, PTFE




- Measuring range: 265 - 3000 mm
- t_{max} 80 °C; p_{max} 0.5 bar
- Connection: G 1 male, adapter: G 1¼, G 1½, round flange, weld-in sleeve
- 1 relay, SPDT



PLS

Pendulum Level Monitor (for bulk materials)

Aluminium, EPDM

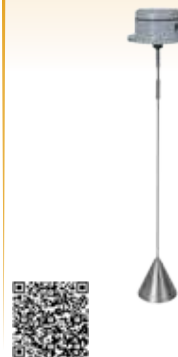

- Pendulum length up to 2000 mm
- t_{max} 80 °C; p_{max} -0.1 ... +0.5 bar
- Process connection: aluminium flange
- Contact: max. 250 V_{AC}/15 A

MM

Float Transducer - Reed Chain

Stainless steel, PVC-U, PP, PVDF



- Measuring range: 300 - 6000 mm
- Density: min. 0.4 kg/dm³
- t_{max} 130 °C; p_{max} 30 bar
- Connection: G ¾ ... 2 male, ¾ ... 2" NPT male, flange DN 40 ... 125, ANSI 1 ½ ... 4"
- Accuracy: ± 10 mm

NMT

Float Magnetostrictive

Stainless steel



- Measuring range: 300 - 4000 mm
- Density: 0.7 - 1.0 kg/dm³
- t_{max} -20 ... +70 °C; p_{max} PN 10
- Connection: G 2, 2" NPT male thread
- Analogue output
- Accuracy: ± 1 mm

NMC

Capacitive Measurement

Stainless steel, PVDF




- Measuring range: 265 - 4000 mm
- t_{max} 200 °C; p_{max} 30 bar
- Connection: G 1, G 2 male thread, adapter: G 1¼, G 1½, weld-in sleeve
- Analogue output
- Measuring error: <1.5 % of probe length

SZM

Bypass Glass Gauge

Stainless steel

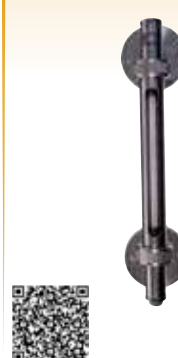

- Measuring range: 370 - 3080 mm
- t_{max} 100 °C; p_{max} 10 bar
- Connection: flange DN 15 ... 50, ANSI ½ ... 2", union nut G ½, ½" NPT



NZJ

Mini - Bypass - Level Gauge

Aluminium, stainless steel



- Installation length: 100 - 540 mm
- Scale length: 60 - 500 mm
- t_{max} 100 °C; p_{max} 16 bar
- Connection: G ¼ male thread, ¼" NPT male thread



NBK - M

Mini Bypass with Roller Indicator

Stainless steel



- Measuring length: 200 - 3000 mm
- Density: 0.8 - 1.0 kg/dm³
- t_{max} 200 °C; p_{max} PN 40
- Connection: flange DN 10... 25, ANSI ½... 1"
- Accuracy: ± 1 mm (transmitter)



HART


EXHAUSTIVE

EXHAUSTIVE

NBK -03, -06, -07, -10

Bypass with Roller Indicator

Stainless steel



- Measuring length: 300 - 5500 mm over 5500 mm 2-piece or multipart
- Density: min. 0.54 kg/dm³
- t_{max} 400 °C; p_{max} PN 100
- Accuracy: ± 1 mm (transmitter)



HART


EXHAUSTIVE

EXHAUSTIVE

NBK -31, -32, -33

Bypass with Roller Indicator - High pressure

Stainless steel



- Measuring length: 300 - 5500 mm
- Density: min. 0.54 kg/dm³
- t_{max} 100 °C; p_{max} PN 320
- Accuracy: ± 1 mm (transmitter)



Ex

HART


EXHAUSTIVE

EXHAUSTIVE

NBK -ATEX

Bypass with Roller Indicator

Stainless steel



- Measuring length: 300 - 5500 mm over 5500 mm 2-piece or multipart
- Density: min. 0.54 kg/dm³
- t_{max} 400 °C; p_{max} PN 100
- Accuracy: ± 10 mm (transmitter)



Ex

HART

EXHAUSTIVE

EXHAUSTIVE

NBK -04

Bypass Over-Top Tank Measurement

Stainless steel



- Measuring length: 300 - 4000 mm
- Density: min. 0.43 kg/dm³
- t_{max} 120 °C; p_{max} PN 16
- Connection: flange DN 50/65, ANSI 2", 2½"
- Accuracy: ± 10 mm (transmitter)



Ex

HART

EXHAUSTIVE

EXHAUSTIVE

NBK -16, -17

Bypass Level Roller Indicator Measurement - Plastic

PP, PVDF



- Measuring length: 200 - 4000 mm
- Density: min. 0.59 kg/dm³
- t_{max} 80 °C; p_{max} 4 bar
- Connection: flange DN 20... 50, ANSI ¾... 2"
- Accuracy: ± 10 mm (transmitter)



NBK -01

Bypass Roller Indicator Low Cost

Stainless steel



- Measuring length: 300 - 5500 mm
- Density: 0.78... 1.18 kg/dm³
- t_{max} 120 °C; p_{max} PN 16
- Accuracy: ± 1 mm (transmitter)





Level Switches / Meters

NBK - 19

Bypass Roll Measuring Rope

PVC



- Measuring length: 0.2 - 4.8 m
- Density: 1 kg/dm³
- t_{max} 60 °C; p_{max} atmospheric
- Accuracy: ± 1 mm (transmitter)



NBK - R, - RT / - RV, - RN

Limit Contact for Bypass Measurement

Aluminium, polycarbonate



- t_{max} 400 °C (-RT)
- t_{max} 200 °C (-RV, -RN)
- Switch capacity: 80 VA, 250 V_{AC/DC}, 1 A (-R, -RT)
- Switch capacity: 5 W, 400 V_{DC}/ 230 V_{AC}, 0.5 A (-RV, -RN)



NBK - RA

Limit Contact for Bypass Measurement



- t_{max} 85 °C
- Switch capacity: 45 VA, 230 V_{AC/DC}, 0.6 A



BA

Displacement Level Meter

Stainless steel



- Measuring range: 300 - 6000 mm
- Density range: 400 - 2000 g/l
- t_{max} 250 °C; p_{max} PN40
- Connection: flange DN 50, ANSI 2"
- Analogue output, 2 limit contacts
- Accuracy: ± 5 mm



NGM

Guided Wave Radar (TDR) - Rod Probe (for process industry)

Stainless steel, PTFE



- Measuring range: 100 - 3000 mm (liquids)
- t_{max} 250 °C; p_{max} 40 bar
- Connection: thread, flange
- Analogue output, switching output
- Accuracy: ± 3 mm or 0.03 % of measured value



NGM

Guided Wave Radar (TDR) - Coax Probe (for process industry)

Stainless steel



- Measuring range: 100 - 6000 mm (liquids)
- t_{max} 250 °C; p_{max} 40 bar
- Connection: thread, flange
- Analogue output, switching output
- Accuracy: ± 3 mm or 0.03 % of measured value



NGM

Guided Wave Radar (TDR) - Rope Sensor (for process industry)

Stainless steel



- Measuring range: 1000 - 20000 mm (solids and liquids)
- t_{max} 150 °C; p_{max} 40 bar
- Connection: thread, flange
- Analogue output, switching output
- Accuracy: ± 3 mm or 0.03 % of measured value



NRM

Non-Contact Radar Level Transm. (TDR) (f. process industry)

Stainless steel, PP, PTFE



- Measuring range: up to 23 m (liquids)
- t_{max} 180 °C; p_{max} 25 bar
- Connection: thread, flange, Tri-Clamp®, DIN 11851, dairy connection
- Analogue output
- Accuracy: ± 3 mm





NGR

Guided Wave Radar (TDR) (for machines / factory automation)

Stainless steel
Rod Probe



Wire Probe



- Measuring range [Rod Probe]: 200 - 2000 mm (liquids)
- Measuring range [Wire Probe]: 200 - 4000 mm (liquids)
- t_{max} 100 °C; p_{max} 10 bar
- Connection: G 3/4, 1/2" NPT male
- Analogue output, switching outputs
- Accuracy: ± 5 mm



IO-Link

NUS - 7

Ultrasonic Measurement

PP, PVDF



- Measuring range: 0.25 - 6 m (liquids)
- t_{max} 80 °C; p_{max} 3 bar abs
- Connection: G2, 2" NPT
- Analogue output
- Accuracy: $\pm 0.2\%$ of reading
 $\pm 0.05\%$ of full scale



HART

NUS - 4

Ultrasonic - Measurement

PP, PVDF



- Measuring range: 0.2 - 25 m (liquids)
0.2 ... 10 m (bulk)
- t_{max} 90 °C; p_{max} 3 bar abs
- Connection: G 1 1/2, G2, 1 1/2" NPT,
2" NPT male, DN80, DN125, DN150,
ANSI 3", 5", 6"
- Analogue output
- Accuracy: $\pm 0.2\%$ of reading
 $\pm 0.05\%$ of full scale



HART

PAD - ... N

Differential Pressure Transmitter with Diaphragm Seal

Stainless steel, Monel®, tantalum, Hastelloy®, PTFE



- Level:
0 ... +2500 mmWC ... 0 ... +150 mWC
- t_{max} 200 °C
- Connection: flange via neck tube
DN50 or bigger
- Accuracy: $\pm 0.075\%$ of calibrated span
+ influence of diaphragm seal



Ex HART

PAS - ... N

Pressure Transmitter with Diaphragm Seal

Stainless steel, Monel®, tantalum, Hastelloy®, PTFE



- Level:
0 ... +2500 mmWC ... 0 ... +150 mWC
- t_{max} 350 °C
- Connection: thread or flange DN50
or bigger
- Accuracy: $\pm 0.075\%$ of calibrated span
+ influence of diaphragm seal



Ex HART

NTB

Deep - Well Probe

Stainless steel, cable polyurethane



- Measuring range: 0 - 1 ... 0 - 200 mWC
- Analogue output
- Cable length: max. 300 m
- Accuracy: $\pm 0.5\%$ of full scale



HART

NPF

Hydrostatic Diaphragm Measurement

Stainless steel



- Measuring range: 0 - 600 ...
0 - 10 000 mmWC
- t_{max} 80 °C
- Connection: G 1/2 male, 1/2" NPT,
DN50 ... DN100, ANSI 2 ... 4"
- Accuracy: $\pm 1.6\%$ of full scale





Temperature Switches / Indicators

TWR

Bi-Metallic Switch

Brass, stainless steel



- Switching range: 30 ... 118 °C
- t_{max} 150 °C; p_{max} 64 bar
- Connection: G 3/4 male thread



TBS

Thermal Reed Switch

Brass, stainless steel



- Switching range: 10 ... 100 °C
- t_{max} 120 °C; p_{max} 25 bar
- Connection: G 1/4 ... G 1 1/2, 1/4" ... 1 1/2" NPT male thread



TDD

Temperature Switch Digital

Stainless steel



- Measuring range: -50 ... +125 °C
- p_{max} 80 bar
- Connection: G 1/2, G 3/4, 1/2" NPT, 3/4" NPT male thread, smooth probe \varnothing 6 mm
- 2 limit contacts
- Accuracy: ± 0.5 °C (-10 ... +85 °C)



TNF-Q

Remote Thermometer DIN 16205 / DIN 16206

Stainless steel



- Measuring range: -40 ... +600 °C
- Housing: 96x96, 144x144 mm
- p_{max} 25 bar
- Connection: G 1/4 ... 1, 1/4" ... 1" NPT, DIN 11851, Tri-Clamp®, Wendel
- Accuracy: cl. 1.0
- Contact: upto 4 times
- Option: application-specific versions



TBE

Bi-Metallic Thermometer

Stainless steel



- Measuring range: -50 ... +50 °C ... 0 ... +600 °C
- p_{max} 15 bar
- Connection: G 1/2 ... 3/4, 1/2 ... 3/4" NPT, fixed, rotatable, slidable
- Accuracy: cl. 1.0



TND

Shaft Thermometer (for Diesel engines)

Steel, stainless steel



- Measuring range: 0 ... +800 °C
- p_{max} 25 bar
- Connection: G 1/2, G 3/4 male thread
- Accuracy: cl. 1.0; 1.6



TNS / TNF

Shaft / Capillary Thermometers DIN 16205 / DIN 16206

Stainless steel



- Measuring range: -40 ... +600 °C
- p_{max} 25 bar
- Connection: G 1/2 ... 1, 1/2 ... 1" NPT, DIN 11851, Tri-Clamp®, helix probe
- Accuracy: cl. 1.0; 1.6



TNS / TNF

Safety Thermometer with Contacts

Stainless steel



- Measuring range: -40 ... +600 °C
- p_{max} 25 bar
- Connection: G 1/2 ... 1, 1/2 ... 1" NPT, DIN 11851, Tri-Clamp®, helix probe
- Accuracy: cl. 1.0; 1.6



TWL - 0

Thermowells (for shaft, capillary + resistance thermometer)

Stainless steel, special materials



- t_{max} 800 °C; p_{max} 250 bar
- Connection: thread, flange, welding sleeve





TDA

Electronic Temperature Sensor

Stainless steel



- Measuring range: $-50 \dots +125^\circ\text{C}$
- p_{max} 80 bar
- Connection: G 1/2, G 3/4, 1/2" NPT, 3/4" NPT male thread, smooth probe \varnothing 6 mm
- Analogue output, limit contact
- Accuracy: $\pm 0.5^\circ\text{C}$ ($-10 \dots +85^\circ\text{C}$)



HND - T105 / T205

Precision Hand-Held Thermometer



- Measuring range: $-50 \dots +400^\circ\text{C}$
- Sensor: Pt 100 or thermocouple type K
- Option: logger, alarm, control function
- Accuracy: from 0.03°C



TMW

Resistance Temperature Sensor - Special Solution

Stainless steel



- Measuring range: $-50 \dots +400^\circ\text{C}$
- Probe: \varnothing 6...18, length from 50 mm
- Housing: aluminium
- Connection: Stainless steel probe adapted to the measuring point incl. screw connection
- 1 or 2 PT 100 cl. A/B (2/4-wire)
- M 12 Plug connection, cable gland

HND - T126

Precision Hand-Held Thermometer



- Meas. range: $-220 \dots +1372^\circ\text{C}$
- Sensor: type K (NiCr-Ni)
- Accuracy: $\pm 0.5^\circ\text{C}$ / $\pm 0.2\%$ of full scale



TGL / TGK

V-Form - Machinery Glass Thermometer

Aluminium, plastic casing, brass



- Measuring range: $-60 \dots +40^\circ\text{C}$... $0 \dots +200^\circ\text{C}$
- Connection: G 1/2, 1/2" NPT male thread
- Accuracy: $\pm 1\%$ of full scale



TSA

Temperature Sensor

Brass, stainless steel



- Measuring range: $-40 \dots +150^\circ\text{C}$
- t_{max} 150°C ; p_{max} 25 bar
- Connection: G 1/4 ... 1, 1/4 ... 1" NPT
- Accuracy: from 0.7°C

Option



TNK

Resistance Thermometer

Brass, bronze, stainless steel



- Measuring range: $-80 \dots +150^\circ\text{C}$
- t_{max} 150°C ; p_{max} 50 bar
- Connection: M 18x1.5, G 1/2, 1/2" NPT
- Accuracy: cl. A or B



MMA + AUF + KUG - S

Screw - In Resistance Thermometer

Stainless steel



- Measuring range: $-70 \dots +250^\circ\text{C}$ (configurable)
- p_{max} 36 bar
- Accuracy: $< 0.5\%$ of span



LTS - A / K

Resistance Temperature Probe with Connection Box



- Measuring range: $-50 \dots +250^\circ\text{C}$
- p_{max} 10 bar
- Connection: G 1/2, M 12x1.5 male, hygienic installation system LZE
- Pt 100, 4 - 20 mA
- Accuracy: cl. A



TWP

Pipe Temperature Sensor

Stainless steel, electropolished



- Dead-zone-free, temperature measurement
- Measuring range: $-20 \dots +200^\circ\text{C}$
- CIP-/SIP compliance
- Connection: DIN 11851 (DIN 11887) DN 15...80 Tri-Clamp® ISO 2852 DN 1/2" ... 2 1/2"
- Housing: DIN head form B oder stainless steel
- Option: PT 100 / Option: 4...20 mA





Temperature Switches / Indicators

MWD

Industrial - Resistance Thermometer

Stainless steel



- Measuring range: -70 ... +250 °C ... -200 ... +600 °C
- p_{max} 30 bar
- Accuracy: cl. A or B



DTE

Digital Thermometer

Stainless steel



- Measuring range: -200 ... +850 °C
- Display: 6-digit, LCD
- Accuracy: ± 0.1 % measured value ± 0.2 °C



MWE

Screw - In Resistance Thermometer

Stainless steel



- Measuring range: -70 ... +250 °C
- p_{max} 30 bar
- Accuracy: cl. A or B



TWA

Sheath - Contact Resistance Thermometer

Stainless steel



- Measuring range: -20 ... +600 °C
- Accuracy: cl. A or B



TWL

Resistance Temperature Measuring Unit

Stainless steel



- Measuring range: -80 ... +600 °C
- p_{max} 250 bar
- Connection: thread, flange, weld-in sleeve
- Pt100, 4 - 20 mA
- Accuracy: cl. A or B



TWL - T

Room Thermometer

Aluminium, polycarbonate



- Measuring range: -40 ... +80 °C
- Wall socket
- Pt100, 4 - 20 mA
- Accuracy: cl. A or B



TTL

Immersion Thermocouples

Stainless steel, alloys



- Measuring range: -200 ... +1100 °C
- p_{max} 250 bar
- Connection: thread, flange, weld-in sleeve
- 4 - 20 mA
- Accuracy: cl. 1.0 or 2.0



TTE

Screw-In Thermocouples with Compensating Lead

Stainless steel



- Measuring range: -200 ... +600 °C
- Connection: G 1/2, M 10 x 1
- Accuracy: cl. 1.0





APM - 1

Transmitter for pH-Value and ORP



- Outputs: 1 binary, 2 analogue
- Switch output: 2 relays with adjustable setpoints

APS

pH-Combined Electrodes

Glass, plastic



- Measuring range: pH 0... 14
- t_{\max} 135 °C; p_{\max} 10 bar
- Diaphragm: PTFE-ring, ceramic

HND - R

Hand-Held Measurement Device (f. pH value, Redox and temperature)



- Measuring range: pH: 0... 14; Redox: -1999... +2000 mV; temperature: -5... +80 °C
- Accuracy: pH: ± 0.01 ; Redox: $\pm 0.1\%$ of full scale; temperature: ± 0.2 °C



ACM - 1

Transmitter for Specific Conductivity



- Measuring range: 0... 200 mS/cm
- Outputs: 1 binary, 2 analogue
- Switch output: 2 relays with adjustable setpoints

ACS

Conductivity Measuring Cells

Stainless steel, graphite



- Measuring range: 0.05 μ S/cm... 15 mS/cm
- t_{\max} 135 °C; p_{\max} 16 bar
- Process connection: G $\frac{3}{4}$ male thread



LCI

Inductive Conductivity Measuring System

PEEK, PVDF, stainless steel



- Measuring range: 0... 2000 mS/cm
- t_{\max} 140 °C; p_{\max} 10 bar
- Integrated Pt 100
- Accuracy: $\pm 0.5... \pm 1\%$ of full scale



HND - C

Hand-Held Conductivity Measuring Unit



- Measuring range: 0... 200 μ S/cm... 0... 200 mS/cm
- Resistance, salinity, TDS
- Accuracy: from $\pm 0.1\%$



AFK - G2

Humidity/Temperature Transmitter



- Measuring range: 0... 100 % rH, 0... +200 °C
- t_{\max} 200 °C; p_{\max} 25 bar
- Outputs: 2 x 4 - 20 mA
- Accuracy: $\pm 2\%$ rH

AFA - G

Humidity Transmitter with Display



- Measuring range: 5... 95 % rH; 0... 60 °C
- t_{\max} 80 °C
- Outputs: 4 - 20 mA
- Accuracy: $\pm 2\%$ rH

AFK - E

Humidity/Temperature Measurement



- Measuring range: 0... 100 % rH; -40... +180 °C
- t_{\max} 180 °C; p_{\max} 20 bar
- Outputs: 2 voltage, 2 current outputs
- Accuracy: $\pm(1.5 + 1.5\%$ of reading) % rH

AFS - G

Hygrostat, Humidity Annex Switch



- Measuring range: 30... 100 % rH
- t_{\max} 60 °C
- Switch output: 1 SPDT
- Accuracy: 3 % rH

ATA - K

Turbidity Measuring System

Stainless steel



- Measuring range: 0... 500 ppm; 0... 4 CU, 0... 10 - 200 FTU
- t_{\max} 150 °C; p_{\max} 16 bar
- Outputs: 4 - 20 mA
- Accuracy: $\pm 2\%$ of full scale



Analysis / Accessories

ATS - K

Turbidity Measuring System

Stainless steel



- Measuring range: 0 ... 500 ppm; 0 ... 4 CU, 0 ... 10 - 200 FTU
- t_{max} 150 °C; p_{max} 16 bar
- Outputs: 4 - 20 mA
- Accuracy: $\pm 2\%$ of full scale



ATT - K

Transmitter for Turbidity Measuring System



- Outputs: 4 - 20 mA
- Switch output: 2 alarm contacts (potential-free SPDT), 1 alarm (lamp and function control)



ATL

Turbidity Probe

Stainless steel



- Measuring range: 0 ... 500 ppm; 0 ... 4 CU
- t_{max} 90 °C; p_{max} 10 bar
- Outputs: 4 - 20 mA
- Accuracy: $\pm 2\%$ of full scale



DWF

Density Meter

Stainless steel




- Measuring range: 700 ... 1900 g/l
- t_{max} 150 °C
- Process connection: flange DN 25 ... 50, ANSI 1 ... 2"
- Option: transmitter contacts



REG

Constant Flow Valves

Brass, stainless steel



- Water: 0.5 - 560 l/min
- t_{max} 300 °C; p_{max} 200 bar
- Connection [single element]: G 1/2, G 3/4, 3/4" NPT
- Connection [multiple elements]: G 1 1/2 ... 2 1/2 flange DN 20 ... 100

KUG -TB, -AG, -JK, -VN, -VL, -ZE, -ZF, -ZG, -PD

Ball Valves

Brass, stainless steel



- t_{max} 180 °C; p_{max} PN 64
- G 1/4 ... 3 female thread
- Hand lever, 1, 2 and 3 piece versions
- T- and L-bore



KUG -VO, -VK

Flange - Ball Valves

Grey cast iron, stainless steel



- t_{max} 180 °C; p_{max} PN 40
- Flange DN 15 ... 200



KUG -S

Ball Valves Shut-off for Measuring Device

Brass, stainless steel



- t_{max} 120 °C; p_{max} PN 25
- G 1/2 ... 2 female thread
- Sensor support: G 1/4, G 1/2



KUP

Ball Valves with Pneumatic Actuator

Grey cast iron, brass, stainless steel



- t_{max} 120 °C; p_{max} PN 16
- G 1/2 ... 4 female thread
- Control pressure: 6 - 8 bar, single or double acting
- T- and L-bore





Accessories/Relays

KLA

Butterfly Valves

Aluminium, GGG-40



- t_{max} 180 °C; p_{max} PN 16
- Flange DN 40 ... 300
- Seals: NBR, FKM, EPDM



KLP

Butterfly Valves with Pneumatic Actuator

Aluminium, GGG-40



- t_{max} 160 °C; p_{max} PN 16
- Flange DN 40 ... 300
- Seals: EPDM, FKM
- Control pressure: 6 - 8 bar, double acting or spring resetting



NAD ...

Needle Valve

Brass, stainless steel

Needle Valve
- AC



Needle Valve
- M, - Z



Angle Seat Valves
- AD, - BE



Outlet Globe Valves
- AB, - BF



- t_{max} 400 °C; p_{max} PN 250
- G 1/8 ... 3, 1/8 ... 1" NPT

MFR / MFF / MFT

Flange Magnetic Filter

Bronze, brass, grey cast iron



- t_{max} 200 °C; p_{max} PN 40
- G 1/4 ... 4, flange DN 50 ... 200
- Filter grade: 50 ... 1200 μ m

KUR - TD, - MR

Check Valves

Red cast iron, brass, stainless steel



- t_{max} 110 °C; p_{max} PN 25
- G 1/4 ... 4 female thread



ZUB - KAB

Electrical Connecting Accessories and Cable



- Circular connectors M12x1, socket
- Connection: terminals, cable, Quickon
- Plastic, brass nickel-plated
- Cable length: max. 10 m



MSR

Pulse - Contact Protection Relay



- Input: potential-free contacts
- Output: 1 or 2 relays, SPDT



KFD - 2 / KFA - 6

Isolation Switching Amplifier for Initiators



- Input: Initiators (Namur), potential-free contacts
- Output: 1 relay, SPDT





Control Devices and Relays

AUF

Plug-On Display



- Input: 4 - 20 mA, pulses
- Output: 4 - 20 mA, switch output PNP
- 4-digit red LED, without additional power supply
- Option: Open-Collector, various colours



DAG-A/S/M

Digital - Panel Mount - Indicators



- Input: current, voltage, temperature, frequency
- Output: pulse, 2x analogue
- Limit contacts
- Min/Max-memory



ADI-1/ADI-1...S

Universal Indicator



- Input: current, voltage, frequency
- Analogue output
- 2 limit contacts
- Sensor supply



ZOK

Industrial Dosing, Counter and Flow Indicator



- Input: frequency
- Analogue output
- Limit contacts
- Impulse output
- Sensor supply
- Battery powered



ZOE

Industrial Counter and Flow Indicator



- Input: frequency
- Pulse output
- Sensor supply
- Battery powered



ZED-K

Electronic for Measuring and Monitoring



- Input: frequency
- Analogue output
- 2 limit contacts
- Sensor supply




ZED-D/Z

Batch Controller/Counter Electronics



- Input: frequency, control input
- Analogue output
- 2 limit contacts
- Sensor supply



DAG-Z2

Counter Electronics/ Batch Controller



- Input: 3 x PNP/NPN
- 2 limit contacts
- Sensor supply



DAG-T4

Universal Panel Meter



- Input: current, voltage, Pt 100, thermocouples
- 2 limit contacts
- Sensor supply



ZLS-2

Electronic Multi - Channel Data Logger



- 8 x input: 0 - 5(10)V/0(4) - 20 mA or thermocouples/ Pt 100, Pt 500, Pt 1000
- Interface: 1 x USB, 1 x RS485
- Sensor supply



Model Register

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
ACM	39	DRB	9	KSR/SVN	3	NKP	28	SMV	6
ACS	39	DRG	11	KSV	3	NMC	32	SWK	5
ADI	6, 42	DRH	11	KUG	25, 37, 40	NMF	31	SZM	32
AFA	39	DRM	23 - 25	KUP	40	NMT	32	TBE	36
AFK	39	DRS	8	KUR	41	NPF	35	TBS	36
AFS	39	DRZ	12	KZA	13	NRM	34	TDA	37
ANU	16	DSS	6	LCI	39	NSC	32	TDD	36
APM	39	DSV	5	LFM	11	NSE	29	TGL/TGK	37
APS	39	DTE	38	LNK	30	NSM	29	TM	15
ATA	39	DTK	11	LNM	30	NSP	28	TMU	15
ATL	40	DUC	18	LNZ	30	NST	29	TMW	37
ATS	40	DUK	19	LPS	7	NSV	31	TND	36
ATT	40	DUS	16	LTS	37	NTB	35	TNK	37
AUF	25, 27, 37, 42	DVE	18	M	28	NUS	35	TNS/TNF	36
BA	34	DVH	18	MAN	21 - 25	NV	28	TSA	37
BGF	5	DVK	13	MAS	14	NVI	31	TSK	8
BGK	5	DVT	16	MFF	41	NWS	31	TTE	38
BGN	5	DVZ	18	MFR	41	NZJ	33	TTL	38
BVB	7	DWD	7	MFT	41	OME	12	TUR	8
DAA/DAH	19	DWF	40	MIK	16	OMG/OMH/		TUV	9
DAB	20	DWN	7	MIM	17	OMK	13	TWA	38
DAF	19	DWU	7	MIS	17	OPT	31	TWL	36, 38
DAG	42	DZR	13	MM	32	OVZ	12	TWP	37
DAI	20	EPS	17	MMA	37	PAD	23, 35	TWR	36
DAK	20	FPS	7	MS	28	PAS	25, 35	UFJ	20
DAR	20	HND	27, 37, 39	MSR	41	PDA	25	UMC	15
DAT	20	HPC	15	MWD	38	PDD	27	URB	4
DAZ	20	KAH	14	MWE	38	PEL	9	URK	4
DF	10	KAL	13, 14	MZB	23, 27	PIT	17	URL	4
DFT	11	KDF/KDG	3	NAB	28	PLS	32	URM	3
DIG	20	KDS	4	NAD	41	PMP	23	USR	4
DIH	19	KEC	14, 15	NBA/NBE	28	PPS	7	UTS	4
DKB	20	KFA	41	NBK	33, 34	PSD	27	UVR/UTR	4
DKF	19	KFD	41	NCW	31	PSE	7	V31	4
DMS	14	KFF	10	NE	30	PSR	7	VKG	6
DOE	12	KFG	10	NEC	29	PUM	22	VKM	6
DOG	18	KFR	3	NEH	29	RCD	16	VKP	6
DON	12	KLA	41	NEK	30	REG	19, 40	ZED	42
DOT	9	KLP	41	NES	29	RFS	28	ZLS	42
DPE	9	KME	14	NEW	29	SCH	27	ZOE	42
DPL	10	KMT	14	NGM	34	SEN	24 - 26	ZOK	42
DPM	10	KPL	15, 16	NGR	35	SFL	9	ZUB	41
DPT	8	KSK	3	NGS	29	SMN	6		
		KSM	3	NIR	32	SMO/SMW	6		

Brand directory:

Tri-Clamp® is a registered trademark of Tri-Clover Inc. of the Alfa-Laval Group.
 Trogamid® is a registered trademark of Evonik Resource Efficiency GmbH.
 Hastelloy® is a registered trademark of Haynes International, Inc.

Ryton® is a registered trademark of Chevron Phillips Chemical Company.
 Monel® is a registered trademark of Special Metals Corporation.

KOBOLD MESSRING GMBH

Manufacturer of Innovative Instrumentation

Australia

KOBOLD Messring GmbH
Sydney
☎ +61 299148787
✉ info.au@kobold.com

Austria

KOBOLD Holding Ges.m.b.H.
Vienna
☎ +43 1 7865353
✉ info.at@kobold.com

Belgium

KOBOLD Instrumentatie NV/SA
Strombeek-Bever - Brussels
☎ +32 22 672155
✉ info.be@kobold.com

Bulgaria

KOBOLD Messring GmbH
Sofia
☎ +359 2 9544412
✉ info.bg@kobold.com

Canada

KOBOLD Instruments Canada Inc.
Pointe Claire, Quebec - Montreal
☎ +1 514 4288090
✉ info.ca@kobold.com

KOBOLD Instruments Canada Inc.
Mississauga, Ontario - Toronto
☎ +1 416 4828180
✉ info.ca@kobold.com

China

KOBOLD Instruments
Trading Co., Ltd.
Pudong - Shanghai
☎ +86 21 58364579
✉ info.cn@kobold.com

KOBOLD Manufacturing Co., Ltd.
Xian
☎ +86 29 86210794/86211407
✉ wang@kobold.com

KOBOLD Instruments Trading
(Shanghai) Co. Ltd.
Tianjin
☎ +86 22 83719393
✉ hou@kobold.com

KOBOLD Instruments Trading
(Shanghai) Co. Ltd.
Guangzhou
☎ +86 20 38803380
✉ zhentx@kobold.com

Czech Republic

KOBOLD Messring GmbH
Brno
☎ +420 775 680 213
✉ info.cz@kobold.com

France

KOBOLD Instrumentation S.A.R.L.
Cergy-Pontoise Cedex - Paris
☎ +33 1 34219115
✉ info.fr@kobold.com

KOBOLD Instrumentation S.A.R.L.
Dardilly - Lyon
☎ +33 4 72162194
✉ rollin@kobold.com

Germany

KOBOLD Messring GmbH
Hofheim/Taunus
☎ +49 6192 299-0
✉ info.de@kobold.com

KOBOLD Messring GmbH Werk II
Sindelfingen - Stuttgart
☎ +49 7031 8677-0
✉ maier@kobold.com

Heinrichs Messtechnik GmbH
Cologne
☎ +49 221 49708-0
✉ info@heinrichs.eu

Hungary

Kobold Unirota Kft.
Nyíregyháza
☎ +36 42 342215
✉ info.hu@kobold.com

India

KOBOLD Instruments Pvt Ltd.
Pune
☎ +91 9370221190
✉ info.in@kobold.com

Delhi
☎ +91 9560028453
✉ delhi.in@kobold.com

Mumbai
☎ +91 9168911003
✉ mumbai.in@kobold.com

Chennai
☎ +91 9168910505
✉ chennai.in@kobold.com

Kolkata
☎ +91 8956041622
✉ kolkata.in@kobold.com

Bengaluru
☎ +91 8956584970
✉ bengaluru.in@kobold.com

Vadodara
☎ +919712233533
✉ gujarat.in@kobold.com

Hyderabad
☎ +91 8956584972
✉ hyderabad.in@kobold.com

Singrauli
☎ +91 8956041623
✉ singrauli.in@kobold.com

Indonesia

KOBOLD Messring GmbH
Jakarta
☎ +62 21 84932859
✉ info.id@kobold.com

Italy

KOBOLD Instruments S.r.l.
Settimo M.se - Milan
☎ +39 02 33572101
✉ info.it@kobold.com

Malaysia

KOBOLD Instruments SDN BHD
Puchong, Selangor
☎ +60 3 80655355
✉ info.my@kobold.com

Mexico

KOBOLD Instruments Inc.
Querétaro
☎ +52 442 2951567
✉ info.mx-mex@kobold.com

Netherlands

KOBOLD Instrumentatie BV
Arnhem
☎ +31 26 3844848
✉ info.nl@kobold.com

Peru

(Support Office Latinamerica)
KOBOLD LATAM S.A.C.
Lima
☎ +51 1 3307261
✉ info@koboldperu.com

Poland

KOBOLD Instruments Sp. z o.o.
Warsaw
☎ +48 (0)22 666 18-94
✉ info.pl@kobold.com

KOBOLD Instruments Sp. z o.o.
Gliwice
☎ +48 730202100
✉ info.pl@kobold.com

Republic of Korea

KOBOLD Instruments Co., Ltd.
Gimpo-City, Gyeonggi-do
☎ +82 31 9035217
✉ info.kr@kobold.com

Singapore

KOBOLD Messring GmbH
Singapore
☎ +65 62271558-6366
✉ info.sg@kobold.com

Slovakia

KOBOLD Messring GmbH
Brno
☎ +420 775 680 213
✉ info.cz@kobold.com

Spain

KOBOLD Mesura S.L.U.
Badalona - Barcelona
☎ +34 93 4603883
✉ info.es@kobold.com

Switzerland

KOBOLD Instruments AG
Dübendorf - Zürich
☎ +41 44 8019999
✉ info.ch@kobold.com

Thailand

KOBOLD Instruments Ltd.
Bangkok
☎ +66 2 5655705-6
✉ info.th@kobold.com

Tunisia

KOBOLD Messring GmbH
Tunis
☎ +216 71 341518
✉ info.tn@kobold.com

Turkey

KOBOLD Instruments Ltd.
Istanbul
☎ +90 212 2222307
✉ info.tr@kobold.com

United Kingdom

KOBOLD Instruments Ltd.
Mansfield - Nottinghamshire
☎ +44 1623 427701
✉ info.uk@kobold.com

USA

KOBOLD Instruments Inc.
Pittsburgh, PA
☎ +1 412 7882830
✉ info@koboldusa.com
✉ info.usa@kobold.com

KOBOLD Eastern Region
Marlborough, MA
☎ +1 401 8291407
✉ info.e@koboldusa.com

KOBOLD Mid-West Region
Medina, OH
☎ +1 412 3891111
✉ info.mw@koboldusa.com

KOBOLD Western Region
Thousand Oaks, CA
☎ +1 310 9122214
✉ info.w@koboldusa.com

KOBOLD South-Eastern Region
Cleveland, GA
☎ +1 843 8121402
✉ info.se@koboldusa.com

Vietnam

KOBOLD Messring GmbH
Ho Chi Minh City
☎ +84 8 35510677
✉ info.vn-hcm@kobold.com

