


DM 505

manometer
connection G 1/4
(option)

leakage line
connection G 1/8
(option)


adjusting screw sealing
(option)

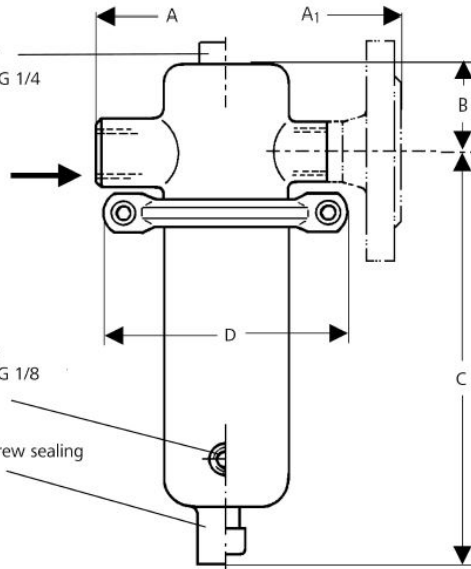

DM 505Z (dimensions see DM 505)

manometer
connection G 1/4
(option)

sense line
connection G 1/4

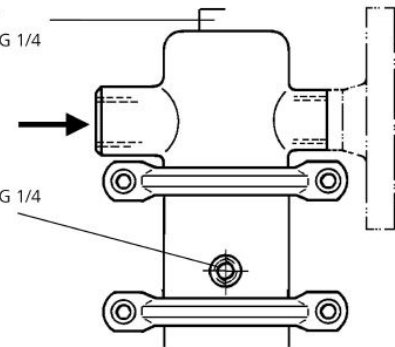

Dimensions [mm]

setting ranges bar	size	G 1/2	flanges acc. to DIN EN 1092-1		
			DN 15	DN 20	DN 25
0,005 - 0,025 0,02 - 0,12	A/A ₁	100	130	150	160
	B	39	39	39	39
	C	257	257	257	257
	D	360	360	360	360
0,1 - 0,5	A/A ₁	100	130	150	160
	B	39	39	39	39
	C	257	257	257	257
	D	264	264	264	264
0,2 - 1,1	A/A ₁	100	130	150	160
	B	39	39	39	39
	C	257	257	257	257
	D	200	200	200	200
0,8 - 2,5	A/A ₁	100	180	180	180
	B	39	39	39	39
	C	196	196	196	196
	D	138	138	138	138
1 - 5 4 - 12 10 - 20	A/A ₁	100	130	150	160
	B	39	39	39	39
	C	190	190	190	190
	D	114	114	114	114