


UV 3.5, UV 3.5S

manometer connection
G 1/4 (option)

sense line connection
EO8 (UV 3.5S)

leakage line
connection G 1/8
(option)


adjusting screw sealing
(option)

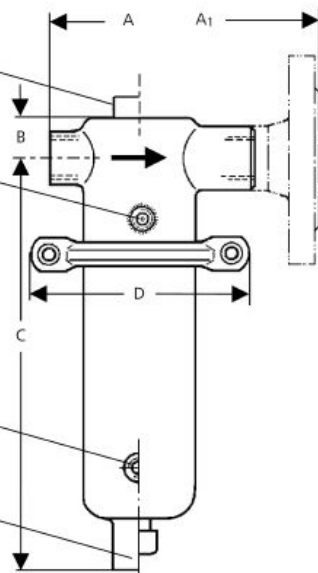

UV 3.5Z (dimensions see UV 3.5)

manometer connection
G 1/4 (option)

sense line connection
G 1/4

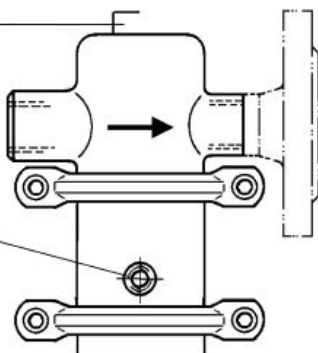

Dimensions [mm]

setting range bar	size	type	nominal diameter			
			G 1/2	DN 15	DN 20	DN 25
all ranges	B	3.5 + 3.5Z	39	39	39	39
0.005 - 0.025 0.02 - 0.12	A/A ₁	3.5 + 3.5Z	100	130	150	160
	C	3.5	275	275	275	272
	C	3.5Z	405	405	405	415
	D	3.5 + 3.5Z	360	360	360	360
0.1 - 0.5	A/A ₁	3.5 + 3.5Z	100	130	150	160
	C	3.5	275	275	275	272
	C	3.5Z	405	405	405	415
	D	3.5 + 3.5Z	264	264	264	264
0.2 - 1.1	A/A ₁	3.5 + 3.5Z	100	130	150	160
	C	3.5	275	275	275	272
	C	3.5 + 3.5Z	405	405	405	405
	D	3.5 + 3.5Z	200	200	200	200
0.8 - 2.5	A/A ₁	3.5	100	180	180	180
	A/A ₁	3.5Z	100	130	150	160
	C	3.5	205	205	205	205
	C	3.5Z	338	338	338	338
	D	3.5 + 3.5Z	138	138	138	138
	D	3.5 + 3.5Z	114	114	114	114
1 - 5 4 - 12 10 - 20	A/A ₁	3.5 + 3.5Z	100	130	150	160
	C	3.5	205	205	205	205
	C	3.5Z	338	338	338	338
	D	3.5 + 3.5Z	114	114	114	114