


UV 4.7

sense line connection EO8

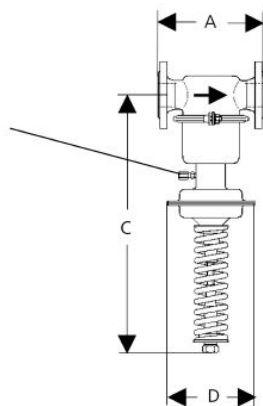


C = max. size with stressless spring

UV 4.8

sense line connection EO8

leakage line connection
G 3/8 (option)

adjusting screw sealing
(option)

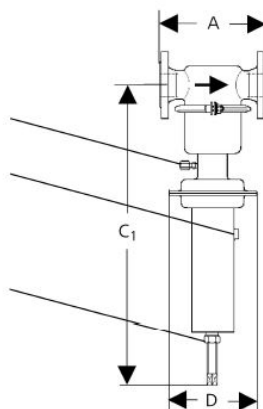

C₁ = max. size with stressless

Dimensions [mm]

setting range bar	DN 50				DN 65			
	A	C	C ₁	D	A	C	C ₁	D
4.5 - 10	230	610	750	220	290	750	890	220
2 - 5	230	610	750	220	290	750	890	220
0.8 - 2.5	230	610	750	220	290	750	890	220
0.2 - 1.2	230	610	750	270	290	750	890	270
0.1 - 0.6	230	610	750	360	290	750	890	360
0.02 - 0.25	230	500	640	360	290	640	780	360
0.02 - 0.15	230	500	640	500	290	640	780	500

Dimensions [mm]

setting range bar	DN 80				DN 100			
	A	C	C ₁	D	A	C	C ₁	D
4.5 - 10	310	750	890	220	350	750	890	220
2 - 5	310	750	890	220	350	750	890	220
0.8 - 2.5	310	750	890	220	350	750	890	220
0.2 - 1.2	310	750	890	270	350	750	890	270
0.1 - 0.6	310	750	890	360	350	750	890	360
0.02 - 0.25	310	640	780	360	350	640	780	360
0.02 - 0.15	310	640	780	500	350	640	780	500